

VEM-H Series UL Listed LED Emergency Driver



Note: Power of emergency driver \geq Power of LED Fixture with Internal driver

PRODUCT DESCRIPTION

LED emergency drivers are UL Listed for factory or field installation, unrivaled emergency solutions for LED product with internal driver. It allows the same LED luminaire to be used for normal and emergency operation and works in conjunction with an AC LED driver that convert new or existing LED fixtures into emergency lighting. The Linear and slim profile is ideally for a narrow, galvanized steel enclosure for installations with limited compartment space. Such as 8w driver for 2FT fluorescent troffer fixture and 16w for the 4FT one. It adopt a long-life recyclable Lithium battery, and are backed by a 5-Year Warranty. It is available in a variety of wattage, providing solutions for 8, 16 and 25 watt applications.

OPERATION

When AC power fails, OKT'S EM-H Series emergency LED driver immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

SELF-TESTING

OKT New version UL listed EM are equipped with self-testing functionality.

- **Initial Self-test after installation**

It will perform a functional test of 3 seconds after the driver installed and will perform second test in 120 minutes to check the wiring and battery output if work. The indicator LED will be off or flicker in case of a failure or an error.

- **Monthly Self-Test**

It will automatically perform a test every 30 days with a duration of 3 seconds, in which the wiring and battery output are checked. In case of a failure or an error, the indicator LED will be off or flicker.



VEM-H Series UL Listed LED Emergency Driver

Mounting configuration

Each unit is available in four different mounting configurations to accommodate various performance requirements and fixture types.

- **Single Flex(Standard Version)**

Mounts to the junction box and provides flexible conduit for remote mounting of the test accessories.



- **Dual Flex(Standard Version)**

Provides dual flex for wiring to both the fixture or driver compartment and test accessories.




- **Integral NonFlex(Optional)**

Allows for integral installation within the driver compartment. May also be mounted at top the fixture when used with a TMK cover accessory.



- **Top-Mount Non-Flex(Optional)**

Top-mounting option for running wires directly into the driver compartment. Test accessories are then installed within the fixture.

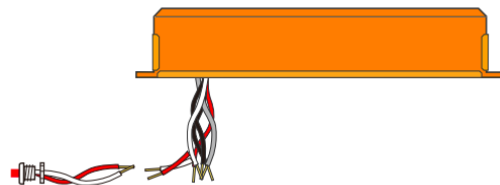

Dimensions



Model	L	W	H
○ VEM-H08170-XX	○ 14.80"	○ 2.13"	○ 1.38"
○ VEM-H16170-XX	○ 17.14"	○ 2.13"	○ 1.38"
○ VEM-H25170-XX	○ 17.14"	○ 2.13"	○ 1.57"

VEM-H Series UL Listed LED Emergency Driver



VEM-H08170-XX	
Output Power	8 Watts
Output Voltage	170V DC
Input Current	35 mA (Max)
Input Power	5 Watts (Max)
Input Voltage	100-277VAC, 50-60Hz
Emergency Operation	≥90 Minutes
Operating Temp	0°C to 50°C
Battery	Lithium
Recharge	24 Hrs
Dimension	L 14.80" x W 2.13" x H 1.38"



VEM-H16170-XX	
Output Power	16 Watts
Output Voltage	170V DC
Input Current	50 mA (Max)
Input Power	6 Watts (Max)
Input Voltage	100-277VAC, 50-60Hz
Emergency Operation	≥90 Minutes
Operating Temp	0°C to 50°C
Battery	Lithium
Recharge	36 Hrs
Dimension	L 17.14" x W 2.13" x H 1.38"



VEM-H25170-XX	
Output Power	25 Watts
Output Voltage	170V DC
Input Current	60 mA (Max)
Input Power	8 Watts (Max)
Input Voltage	100-277VAC, 50-60Hz
Emergency Operation	≥90 Minutes
Operating Temp	0°C to 50°C
Battery	Lithium
Recharge	36 Hrs
Dimension	L 17.14" x W 2.13" x H 1.57"

TYPICAL WIRING DIAGRAM

