
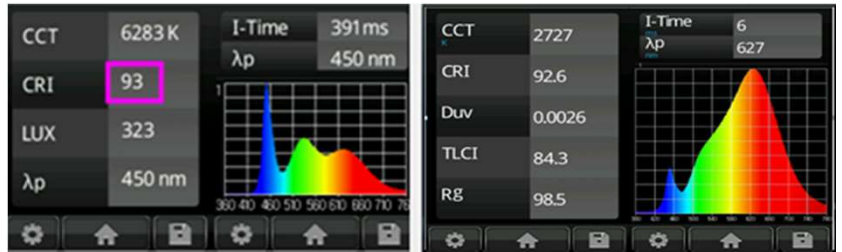


Applications:


- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:


- ◆ View angle **170 degrees**
- ◆ With adhesive tape on backside
- ◆ Made of high quality LEDs
- ◆ Work Voitage: DC24V version and DC12V Version
- ◆ No Light Spot
- ◆ **UL, CUL, CE, ROHS Approved**

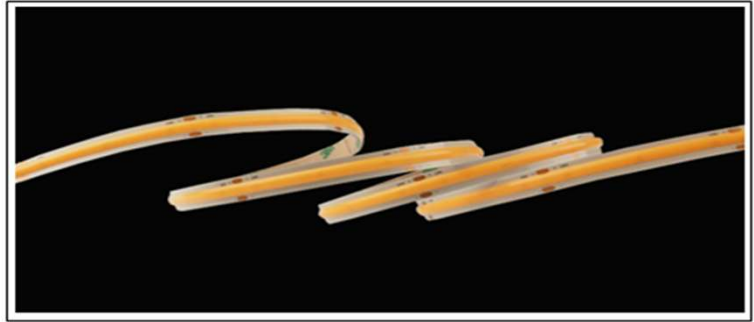


Dimensions Drawing of DC12V, 8mm version

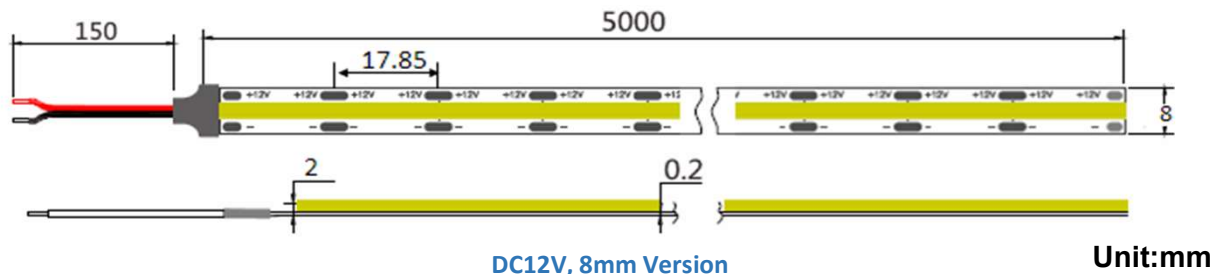

Dimensions Drawing of DC24V, 8mm version

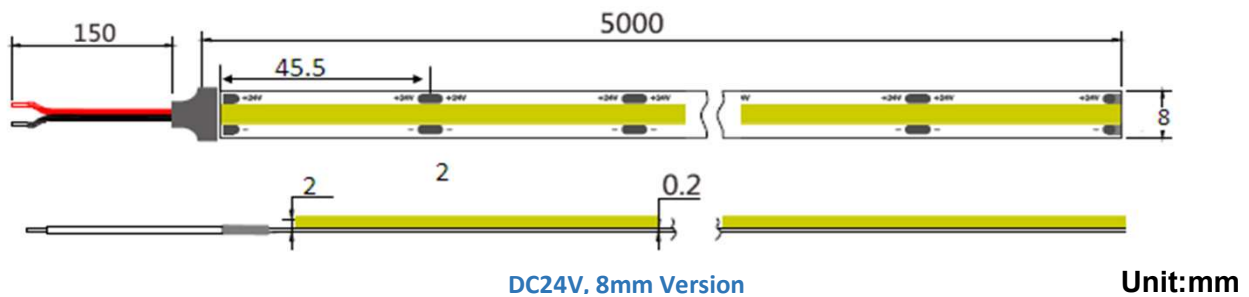

Dimensions Drawing of DC24V, 10mm version

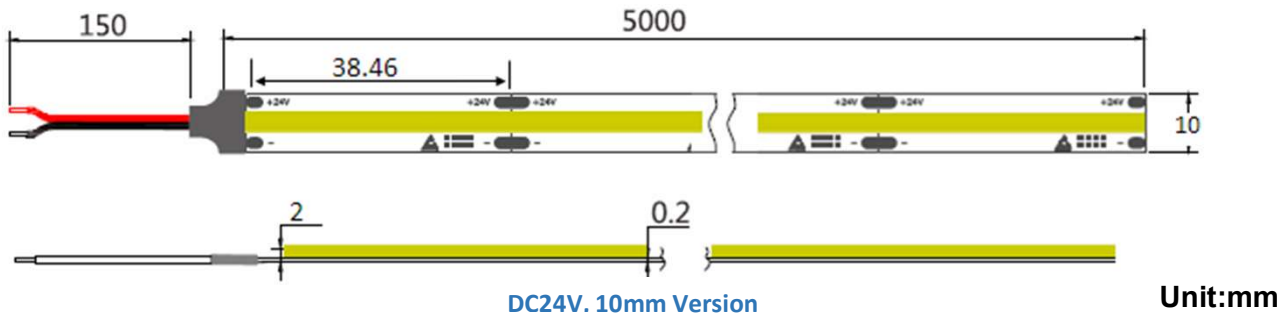


Specifications

Model No.	Power (W/m)	Voltage	CRI (Ra)	PCB Width	Cutting (mm)	Water-proof	Color	(CT:K)	Lumen (lm/m)
F0603X264SA-W-12-COB	12W	12V	≥90	8mm	17.85	IP20 IP67	☐ Warm White	2700K 3000K	850-900
F0603X264SA-N-12-COB							☐ Nature White	4000-4500K	900-950
F0603X264SA-P-12-COB							☐ Pure White	6000-6500K	950-1000
F0603X264SA-W-24-COB	14W	24V	≥90	8mm	45.45	IP20 IP67	☐ Warm White	2700K 3000K	1200-1300
F0603X264SA-N-24-COB							☐ Nature White	4000-4500K	1300-1350
F0603X264SA-P-24-COB							☐ Pure White	6000-6500K	1350-1450
F0603X264SA-W-12-COB10	12W	12V	≥90	10mm	17.85	IP20 IP67	☐ Warm White	2700K 3000K	850-900
F0603X264SA-N-12-COB10							☐ Nature White	4000-4500K	900-950
F0603X264SA-P-12-COB10							☐ Pure White	6000-6500K	950-1000
F0603X264SA-W-24-COB10	18W	24V	≥90	10mm	38.46	IP20 IP67	☐ Warm White	2200/2700/ 3000/3500K	1400-1500
F0603X264SA-N-24-COB10							☐ Nature White	4000/5000K	1500-1600
F0603X264SA-P-24-COB10							☐ Pure White	6000-6500K	1600-1700
F0603X264SA-R-24-COB	14W	24V	/	8mm	45.45	IP20 IP67	■ Red	620-630nm	160-170
F0603X264SA-G-24-COB							■ Green	520-525nm	900-980
F0603X264SA-B-24-COB							■ Blue	460-470nm	160-170
F0603X264SA-Y-24-COB							■ Yellow	590-595nm	1000-1100

Remark: X is for Waterproof type. A for Non-waterproof, C for IP67

Connection drawings

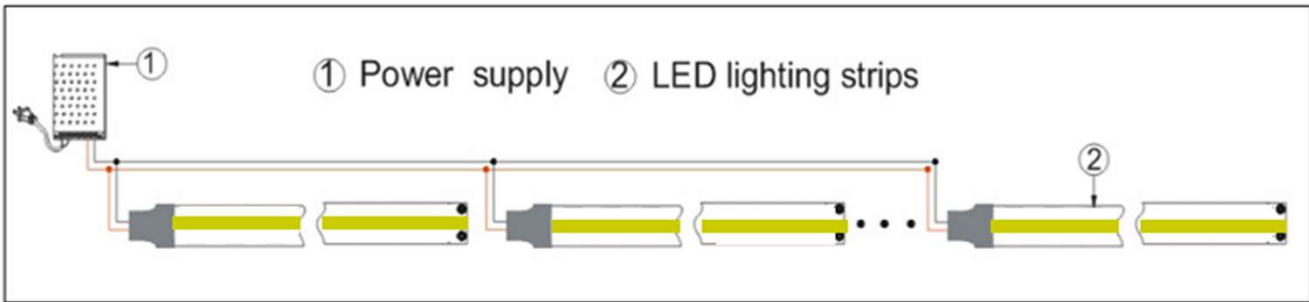

Notice:

Before application, please make sure the power supply is in accordance to the strips