

RECESSED FIREBOX TROFFER



VFBX22



VFBX24

Model Number	Inside Height	Outside Width	Outside Length
VFBX22	5"	27"	29"
VFBX24	5"	28"	52"
VFBX14	5"	16"	52"

Performance Data

For Use:

- UL Classified to maintain the fire rating (1 hour) for the following fire-rated assemblies: A202, D203, D216, D219, G205, G208, G218, G252, G255, G256, G262, G264, J201, J202, L006, L201, L202, L206, L209, L210, P202, P204, P206, P207, P210, P211, P213, P214, P216, P225, P227, P228, P229, P230, P231, P235, P238, P242, P246, P250, P251, P254, P255, P259, P260, P261, P264, P265, P267, P268, P269



CLASSIFIED FOR FIRE RESISTANCE
FIRE RESISTANCE CLASSIFICATION
SEE UL FIRE RESISTANCE DIRECTORY

General Information



Benefits:

- 60 minute protection.
- Fits most fluorescent fixtures.
- Compatible with lay-in tile ceilings.
- Easy Installation
- No additional screws, drilling or additional sealant required.
- Reduces heat loss through the fixture.
- Maintenance free.
- Cable entry points can be made anywhere on fixture



RECESSED FIREBOX TROFFER

PRODUCT DIMENSIONS

VFBX22

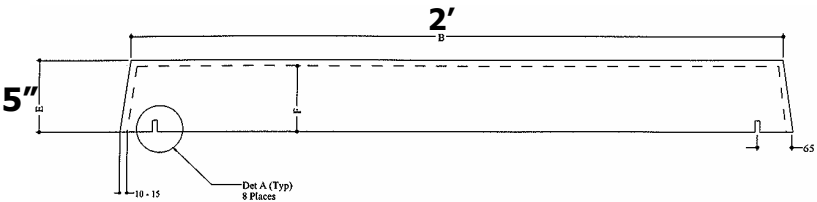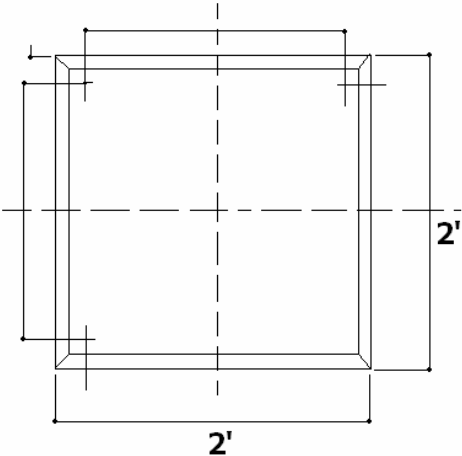

VFBX24

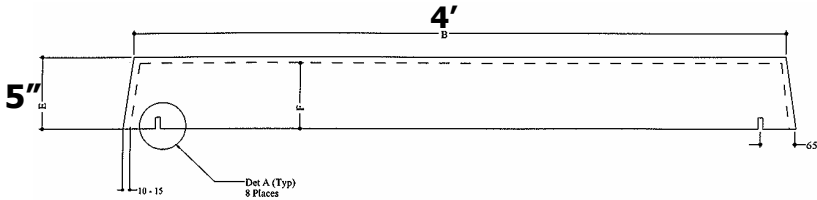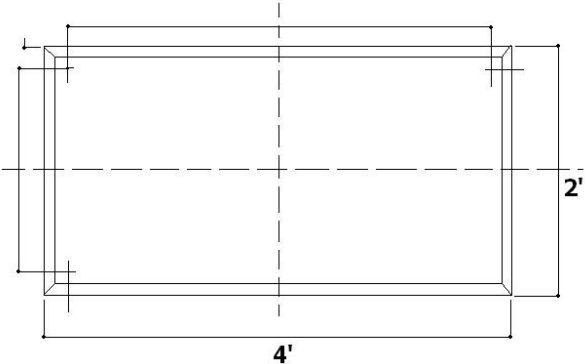

VFBX14

