

LED Emergency Remote Head



Certifications



Description


This remote lamp-head unit easily enhances your emergency lighting when connected to any emergency fixture with remote head capability. Its housing is injection-molded from engineering-grade thermoplastic, featuring 5VA flame-retardant and high impact resistance.

Specifications

Model NO	VE-RH-1(WH)	VE-RH-2(WH)
Input Power	Max 1.2W	Max 2.4W
Input Voltage	3.6-9.6Vdc	
Light Source	12 Pcs SMD 2835 LEDs	24 Pcs SMD 2835 LEDs
Lumen Output	120 LM	240 LM
Lamp Head(s)	1 lamp head	2 lamp heads
Housing Material	Thermoplastic	
Canopy Material	Aluminum	
Finish	White	
Mounting Options	Ceiling or Wall Mount	
Recommended Mounting Height	9.75ft	13.29ft
Application	Indoor or Outdoor	
Location Rating	Suitable for Wet Location	
Operating Temperature	32°F – 104°F (0°C-40°C)	
Warranty	5-year Limited Warranty	

Dimensions

VE-RH-1(WH)

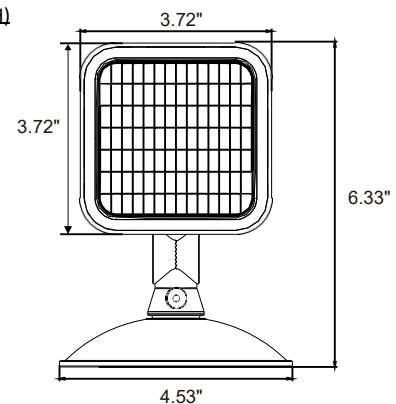

VE-RH-2(WH)

