




Linear Troffer Retrofit Kit

LED Linear Troffer Retrofit Kit

DLC V4.0 Certificated

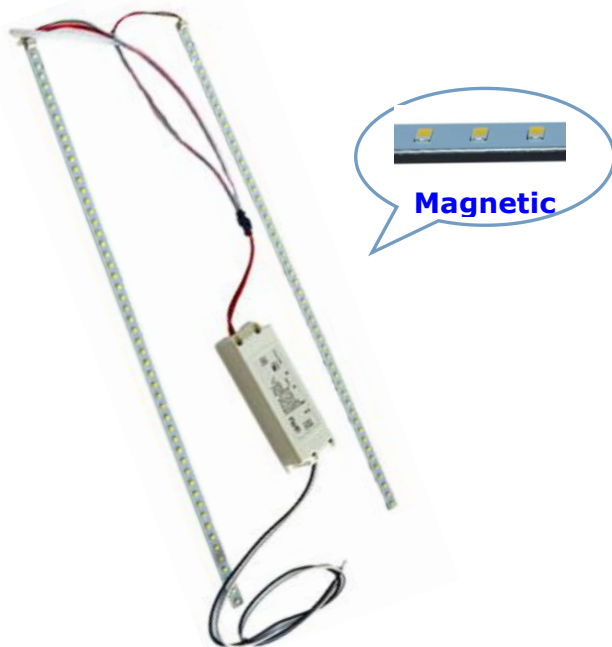

Overview

V.E.'s LED Linear Troffer Retrofit Kit Strips are economic LED replacements for 1'x4', 2'x2' and 2'x4' existing recessed troffers in drop-in ceilings. The kits are magnetic backed for easy install, just need seconds.

Features

- Voltage: 100-277V/60Hz
- Lumen Efficiency: Luminous Efficiency: >150 lm/w LED module, 100-125 lm/w Luminaire
- Power Factor: up to 0.998
- CCT: 3000, 3500, 4000, 5000K
- CRI (Ra): 80 nominal
- Mounting method: Magnetic led strips and driver, quick-connect
- Replacements: Retrofit 2' x 2', 1' x 4', and 2' x 4' "troffers" and 4' and 8' linear fluorescent fixtures
- Dimmable is also available
- Frost lens is available

Application

The LED Retrofit Kit Strips replace traditional tubes in a variety of commercial applications, including offices, lobbies, hallways and conference rooms in schools, libraries, airports, showrooms and hospitality environments.

Model Selection

Rated Power	LED Strips Q'ty x Length	Model No.	Lumen	Ra	Beam Angle	Fits Fixture	Mounting	Certification
20W	2pcs x 550mm	VR2-22TR20WXXK	2450	80	140°	2' x 2' Troffer	Magnetic/Screw	DLC Standard
32W	2pcs x 1100mm	VR6-24TR32WXXK	4500			1 x 4'/2x4 Troffer	Magnetic/Screw	DLC Standard
40W	2pcs x 1100mm	VR2-24TR40WXXK	4500			2' x 4' Troffer	Magnetic/Screw	DLC Standard
50W	2pcs x 1100mm	VR4-24TR50WXXK	6200			2' x 4' Troffer	Magnetic/Screw	DLC Standard
50W	4pcs x 1100mm	VR4-28TR4S50WXXK	6400			8' Fixture	Magnetic/Screw	DLC Standard

***3500K, 4000K, 5000K CCT are available on request**


***Dimmable is also available**

***Frost Lens is also available**

Linear Troffer Retrofit Kit

LED Linear Troffer Retrofit Kit with Frost Lens

DLC V4.2 Certificated

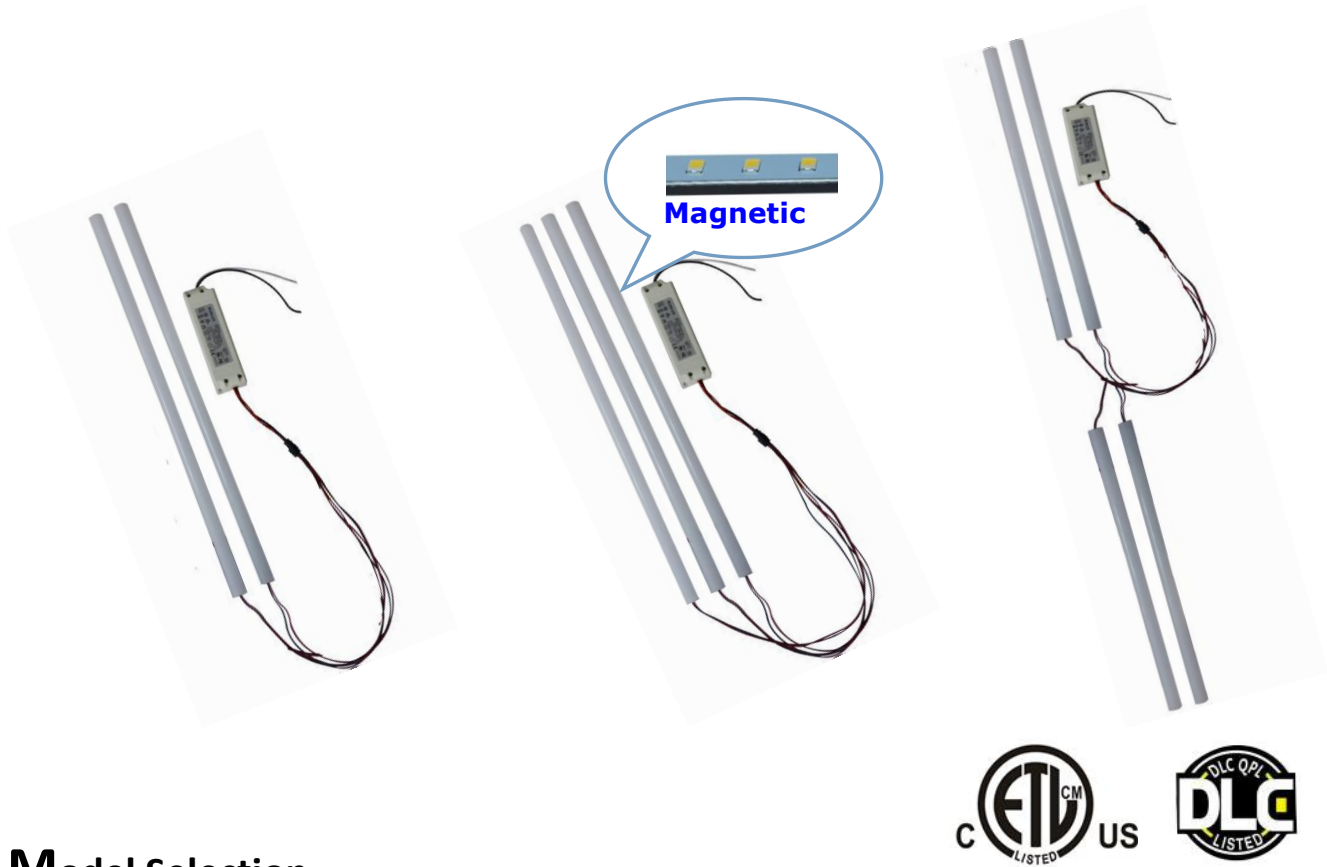

Model Selection

Rated Power	LED Strips Q'ty x Length	Model No.	Lumen	Ra	Beam Angle	Fits Fixture	Mounting	Certification
20W	2pcs x 550mm	VR6-22TRF20WXXK	2700	80	140°	2' x 2' Troffer	Magnetic/Screw	DLC Standard
22W	3pcs x 550mm	VR6-22TRF3S22WXXK	2970			2' x 2' Troffer	Magnetic/Screw	DLC Standard
36W	2pcs x 1100mm	VR6-24TRF36WXXK	5040			2' x 4' Troffer	Magnetic/Screw	DLC Standard
36W	3pcs x 1100mm	VR6-24TRF3S36WXXK	5040			2' x 4' Troffer	Magnetic/Screw	DLC Standard
50W	4pcs x 1100mm	VR4-28TRF4S50WXXK	6400			8' Fixture	Magnetic/Screw	DLC Standard

*4000K, 5000K CCT are available on request

*Dimmable is also available

Linear Troffer Retrofit Kit

Specifications

Item	specification	Model				
		R2-22TR20W50K	R6-24TR32W50K	R6-24TR36W50K	R4-24TR50W50K	R4-28TR4S50W50K
General Performance	Power	20W	32W	36W	50W	50W
	Consumption					
	Lumens Delivered	2450lm	4500lm	5040lm	6200lm	6400lm
	Efficacy(lm/w)	115	140	140	115	115
	CRI	80	80	80	80	80
	Color Temp	5000K	5000K	5000K	5000K	5000K
	Lifetime	50,000Hrs				
	Color Consistency	Proprietary binning for uniform color				
	Power Factor	0.99				
Input voltage	100-277V standard					
Physical	Housing	Plastic				
	Mounting	Magnetic/Screw				
	Humidity	20%-85% RH,non-condensing				
Certification	Certification	FCC, LM-79, LM-80, UL(driver), ETL,DLC.				
	Environment	Damp-listed				
	Warranty	5 years limited				