

LED Outdoor Wall Sconce - MWP02 Series




Application: Perfect for indoor and outdoor locations such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.


Certification



Dimension

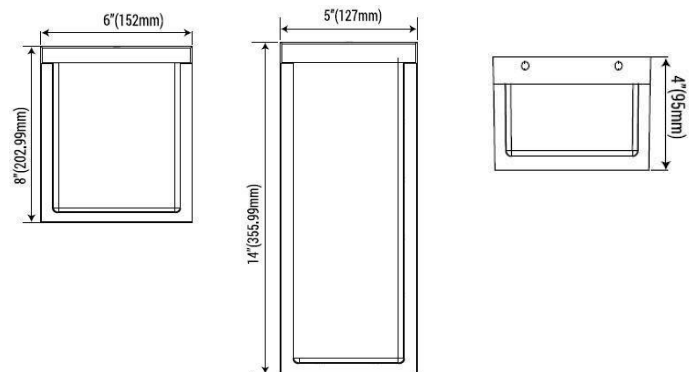

Feature

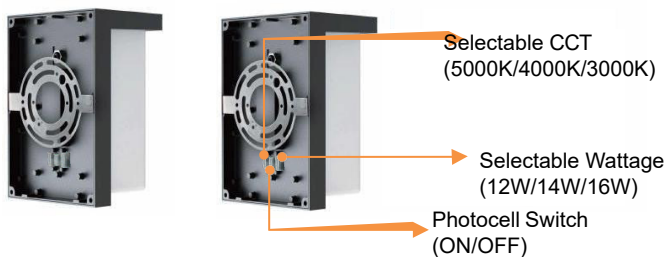

Specifications

Model	HYA-MWP02-0864-H-3W3CCT(PTC)	HYA-MWP02-1454-H-3W3CCT(PTC)
Wattage	12W / 14W / 16W	18W / 20W / 22W
Input Voltage	AC 100-277V, 50/60Hz	
Dimming	Non- dimmable	
Lumen Output	1742 lm	2619 lm
CCT	3000K / 4000K / 5000K or 3500K / 5000K / 6500K (Selectable)	
Beam Angle	125°	
CRI	Ra > 80	
Size (W x H x D)	6" x 8" x 4"	5" x 14" x 4"
Lens	White Acrylic	
Finish	Black	
Operating Temperature	-4°F ~ +113°F (-20°C ~ +40°C)	
Location Rating	Wet Location Rated (IP66)	
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours	
Accessories & Options	Photocell Control (PC) pre-installed, On/Off switching Option available	
PCS/BOX	10	10
Master Box Dimension	20.3" x 12.6" x 8.9" (516 x 320 x 226 mm)	20.3" x 11.2" x 14.8" (516 x 284 x 376 mm)
Master Box Weight	15.00 lb (6.8 kg)	18.30 lb (8.3 kg)

