



LED LINEAR HIGH BAY VLH07



VE's new generation of Linear high bay series VLH07, while ensuring high energy efficiency, excellent light uniformity and long lifespan, aims to reduce the contractor's budget, making it an ideal choice for retrofit or new project installation. The compact structure design makes the installation of the fixture easier and faster. Each model supports CCT & Wattage Selectable, which improves the flexibility and convenience of on-site installation and significantly reduces stocking SKUs.

SPECIFICATION

Construction

- The rugged, one-piece die-cast aluminum housing features a rock-solid quality and performance.
- The LED module and driver are I-separated and extend service life through convection cooling, thermal management.
- The compact design saves labor cost and improves installation efficiency
- Innovative contractor-friendly packaging makes installation faster.

Optics

- Light engines are available in color selectable version, the CCT can be changed to two CCTs (4000K, 5000K).
- Scalable Lumen Packages from 5,100 to 60,600 Lumens.
- Prismatic translucent lens is designed to shape the light uniformity and controls the glare light.

Installation

- Steel wire rope mount (default).
- Surface mount (option).
- Conduit pendant mount (option).

Lifespan

- Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Certifications

- UL cUL damp location listed.
- DesignLights Consortium™ Qualified.

Warranty

- Five-year limited warranty.



Electrical

- Universal 120-277VAC or 347-480VAC input voltage.
- Wattage adjustable: 100%, 80%, 60%, 40p.
- 0-10v dimming standard for a dimming range of 100% to 10%.
- PF > 90%, THD < 20%, 6KV surge protection.
- Operating Temperature Range: -40°C to 50°C (-40°F to +122°F).
Note: Operating with emergency battery temperature range: 5°C to 50°C (+41°F to +122°F).

Applications

- Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

Controls

- Optional PIR Sensor or Bluetooth Smart Control Sensor available for further energy-saving.
- The standard sensor receptacle can quickly install sensors on site.

Note



- Actual performance may differ as a result of end-user environment and application.
All values are design or typical values, measured under laboratory conditions at 25°C (±5°C) specifications subject to change without notice.

PRODUCT ORDERING GUIDE

Ordering Guide Example: VLH07130W27VDDKWYYYY

Fixture Type	Voltage	Wattage	Finish	Sensor (Option)	CCT	Backup Battery	Internal Code
<input checked="" type="radio"/> VLH07 Linear high bay series	<input type="radio"/> 120-277V <input type="radio"/> 347-480V	<input type="radio"/> 130W <input type="radio"/> 160W <input type="radio"/> 205W <input type="radio"/> 250W <input type="radio"/> 300W <input type="radio"/> 410W	<input type="radio"/> White	<input type="radio"/> Blank Without Sensor <input type="radio"/> M With Sensor	<input type="radio"/> DDK CCT Adjustable	<input type="radio"/> Emergency Battery <input type="radio"/> Without Emergency Battery	<input type="radio"/> Blank Alphanumeric <div style="background-color: #006633; color: white; padding: 5px; text-align: center;">Lens</div> Prismatic Diffuser Aisle Lens Narrow Lens



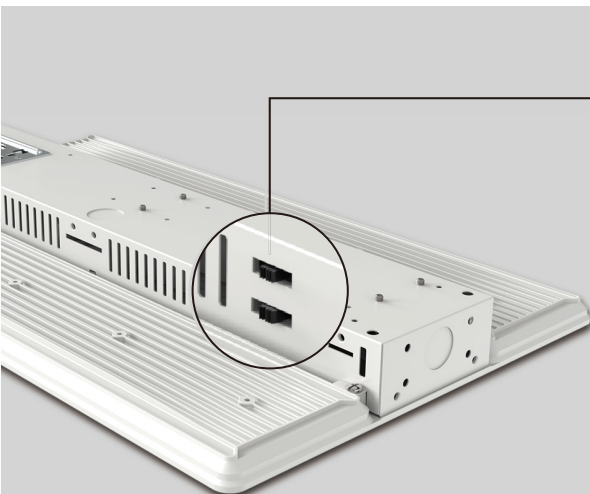

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

CCT SELECT

4000K 5000K

Offer two CCT adjustable (4000K,5000K).

WATTAGE SELECT

40% 60% 80% 100%

Each model supports 4 positions wattage regulation: 100%, 80%, 60%, 40%

PERFORMANCE DATA

130 Watts

SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	130W	18500lm	142 lm/W	18500lm	142 lm/W
80%	104W	15200lm	146 lm/W	15200lm	146 lm/W
60%	78W	12100lm	155 lm/W	12100lm	155 lm/W
40%	52W	8200lm	158 lm/W	8200lm	158 lm/W

160 Watts

SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	160W	24100lm	151 lm/W	24100lm	151 lm/W
80%	128W	20000lm	156 lm/W	20000lm	156 lm/W
60%	96W	15500lm	161 lm/W	15500lm	161 lm/W
40%	64W	10600lm	166 lm/W	10600lm	166 lm/W



205 Watts

SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	205W	30500lm	149 lm/W	30500lm	149 lm/W
80%	164W	25000lm	152 lm/W	25000lm	152 lm/W
60%	123W	19500lm	159 lm/W	19500lm	159 lm/W
40%	82W	14000lm	171 lm/W	14000lm	171 lm/W

250 Watt

SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	250W	36100lm	144 lm/W	36100lm	144 lm/W
80%	200W	30200lm	151 lm/W	30200lm	151 lm/W
60%	150W	24000lm	160 lm/W	24000lm	160 lm/W
40%	100W	16400lm	164 lm/W	16400lm	164 lm/W

300 Watt


SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	300W	42000lm	140 lm/W	42000lm	140 lm/W
80%	240W	36000lm	150 lm/W	36000lm	150 lm/W
60%	180W	28000lm	156 lm/W	28000lm	156 lm/W
40%	120W	20000lm	167 lm/W	20000lm	167 lm/W

410 Watt


SETTING	SYSTEM WATTS	4000K (80CRI)		5000K (80CRI)	
		LUMENS	LPW	LUMENS	LPW
100%	410W	60600lm	148 lm/W	60600lm	148 lm/W
80%	328W	50000lm	152 lm/W	50000lm	152 lm/W
60%	246W	38400lm	156 lm/W	38400lm	156 lm/W
40%	164W	28000lm	171 lm/W	28000lm	171 lm/W

DIMENSION


unit: mm/inch

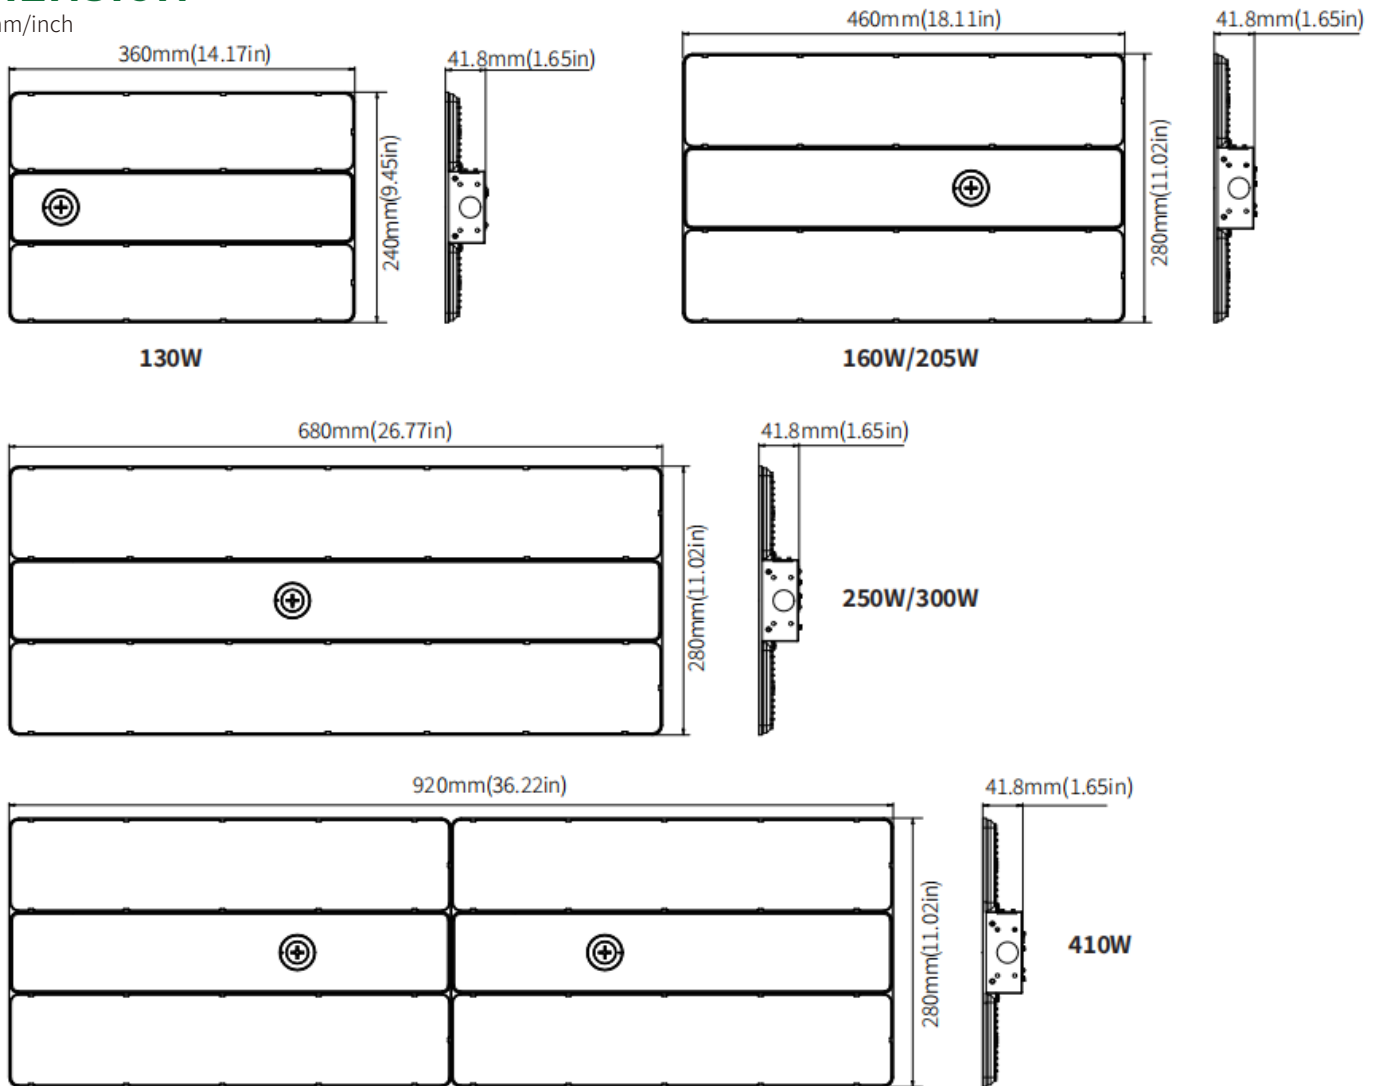


MOUNTING

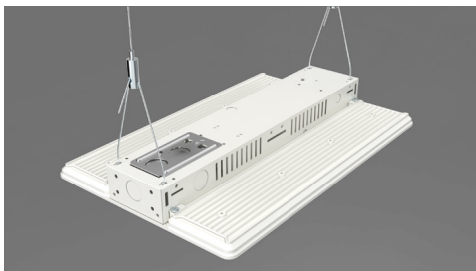

Mounting With Steel Wire Rope

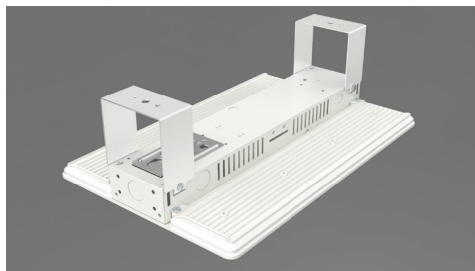



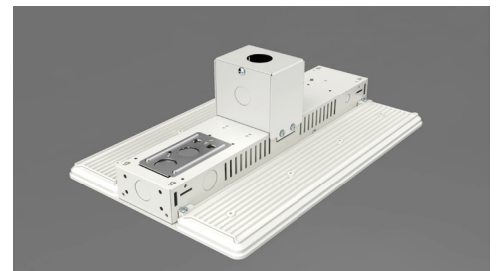


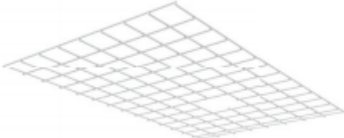


Surface Mounting



Conduit Pendant Mount

ACCESSORIES (Optional)

			
Emergency Battery 8W 900lm 90min, suit for 130W (Sold separately)	Emergency Battery 15W 2000lm 90min, suit for 160W, 205W (Sold separately)	Emergency Battery 25W 3500lm 90min, suit for 250W, 300W, 410W (Sold separately)	Emergency Battery 30W, 4000lm, 90min, suite for 347-480V input voltage (Sold separately)
			
Plug-and-Play PIR Sensor 12-24VDC PIR sensor: MSANT12VPH01 Bluetooth PIR sensor: MSANT12VPHB01 (Sold separately)	Plug-and-Play Microwave Sensor 12-24VDC Microwave sensor: MSANT12VMH01 Bluetooth microwave sensor: MSANT12VMHB01 (Sold separately)	Steel Wire Rope(Default) USE: Chain mounting.	Wire Guards (Sold separately)

Note: Main Stocking sensor's SKU: MSANT12VPH01.

PHOTOMETRICS

