



FEATURES

- VANDAL RESISTANT
- OPERATING TEMPERATURE - 76°F TO +212°F
- EXPLOSION PROOF
- WATERPROOF
- REQUIRES NO WIRING
- FIELD SELECTABLE DIRECTION ARROWS
- INSTALLS IN MINUTES
- SUITABLE FOR CLEAN ROOM APPLICATIONS
- NO BULB TO FAIL OR REPLACE
- CORROSION RESISTANT
- FAIL SAFE
- RECYCLABLE IF RETURNED TO MANUFACTURER
- LIGHTWEIGHT
- 10 OR 20 YEAR LIFE
- TOTALLY SELF POWERED

TYPICAL APPLICATIONS



* NO ELECTRICITY


* NO BATTERIES

* ALWAYS ON

* SELF-POWERED

* NO MAINTENANCE

SPECIFICATIONS

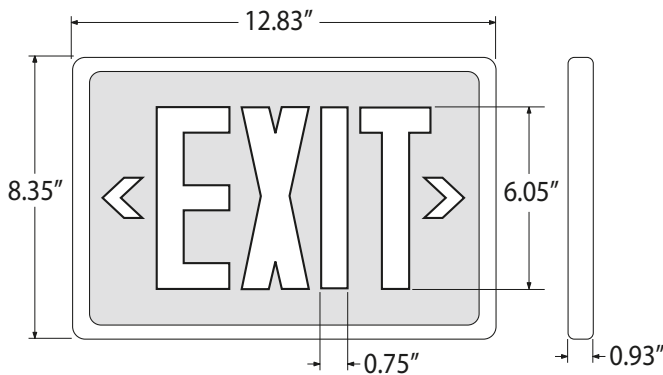

ILLUMINATION SOURCE

- Borosilicate (hard) glass
- Internally coated with phosphorescent powder
- Filled with Tritium gas

BRIGHTNESS

- Minimum brightness at time of manufacture of 0.15 foot lamberts.

CONSTRUCTION

- Encased in high-impact, fire-retardant ABS plastic

COMPLIES WITH:

- NFPA Life Safety Code 101
- U.L. 924
- City of Los Angeles
- State of California
- Council of American Building Officials (ICBO, SBCCI)
- OSHA
- USNRC
- ISO 9001

* NO ELECTRICITY

* NO BATTERIES

* ALWAYS ON

* SELF-POWERED

* NO MAINTENANCE

ORDERING INFORMATION

MODEL	LIFE IN YEARS	FRAME COLOUR	FACES	LEGEND COLOUR	ACCESSORIES
TX	10 - 10 Years	GY - Gray	S - Single	RD - Red	WG - Wire Guard
	20 - 20 Years	BK - Black	D - Double	GN - Green	AF - Aluminum Frame
		WH - White		BK - Black	PC - Polycarbonate Window
					PM - Pendant Mount
					SC - Security Cover

ORDERING EXAMPLE: TX-10-BK-S-RD = BX, 10 Year, Black Frame, Single Face Sign with Red Legend