

LED Track Light (TL04)

Wattages: 10W, 20W, 30W



ARCHITECTURAL LIGHTING SOLUTIONS



Support Halo/Juno exchangeable adapter.
90+CRI with 3-step MacAdam Ellipse.
High-Efficacy with precise Center Beam
Candle Power.
Can pivot +/-90° vertically.
With adjustable focus
Recommended Application Retailers,
Supermarkets,
Restaurants, Shopping Mall, etc.



PRODUCT FEATURES:

- 110LPW & Triac dimming for single CCT and wattage.
- 90LPW & Non-dimmable for CCT & wattage selectable.
- Daisy connection with very convenient replacement in 1 minute.
- Single voltage: AC120V.
- Available with suspending installation and surface-mounted installation.
- 20°-50° Beam Angle for variety choices.
- 5 years warranty.


SPECIFICATION					
MODEL	TL04-10W -XXK-YY-X-Z	TL04-20W -XXK-YY-X-Z	TL04-30W -XXK-YY-X-Z	TL04-20/15/10W -TCP-YY-X-Z	TL04-30/25/20W -TCP-YY-X-Z
WATTAGE	10W	20W	30W	20/15/10W	30/25/20W
CCT	2700K/3000K/3500K/4000K/5000K Single CCT			2700K/3000K/3500K/4000K/5000K Selectable CCT	
EFFICACY	Up to 110LPW			Up to 90LPW	
CRI	Ra >90				
INPUT VOLTAGE	AC120V				
DISTRIBUTION	20-50°adjustable				
POWER FACTOR	0.9				
DRIVER EFFICACY	87%				
LIFE SPAN	over 50,000 hrs				
WORKING TEMPERATURE	-40°F~104°F				
STORAGE TEMPERATURE	-40°F~176°F				
WARRANTY	5 year limited				



Wattages: 10W, 20W, 30W


Adapter:

- Compatible with H-type track adapter, J-type track adapter, suitable for all your projects requirements.
- H type and J-type track adapter are interchangeable

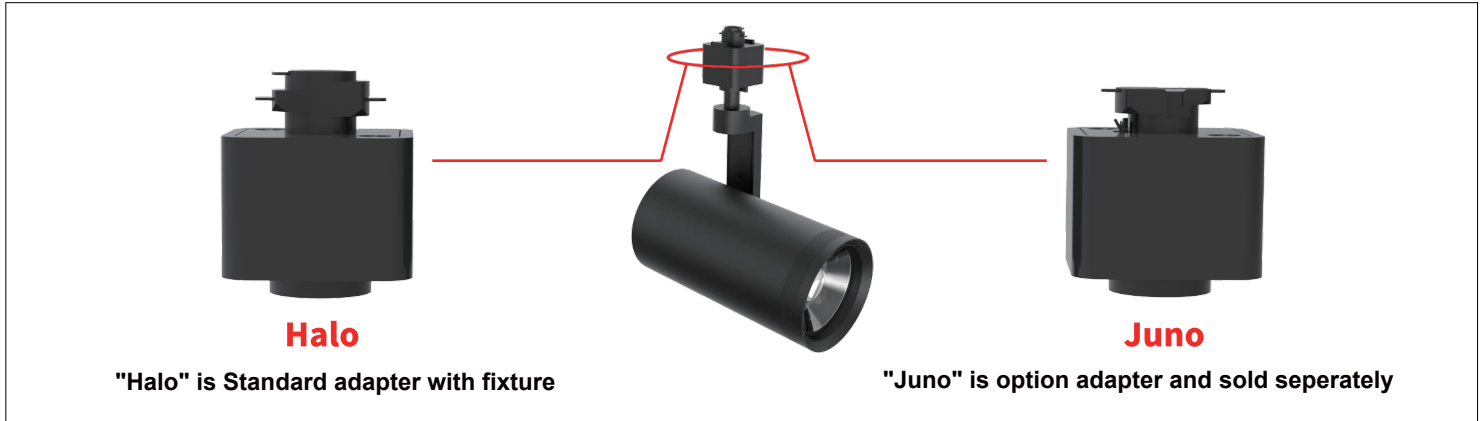

Luminaire Arm:

- 180° tilt and 350° rotation adjustable

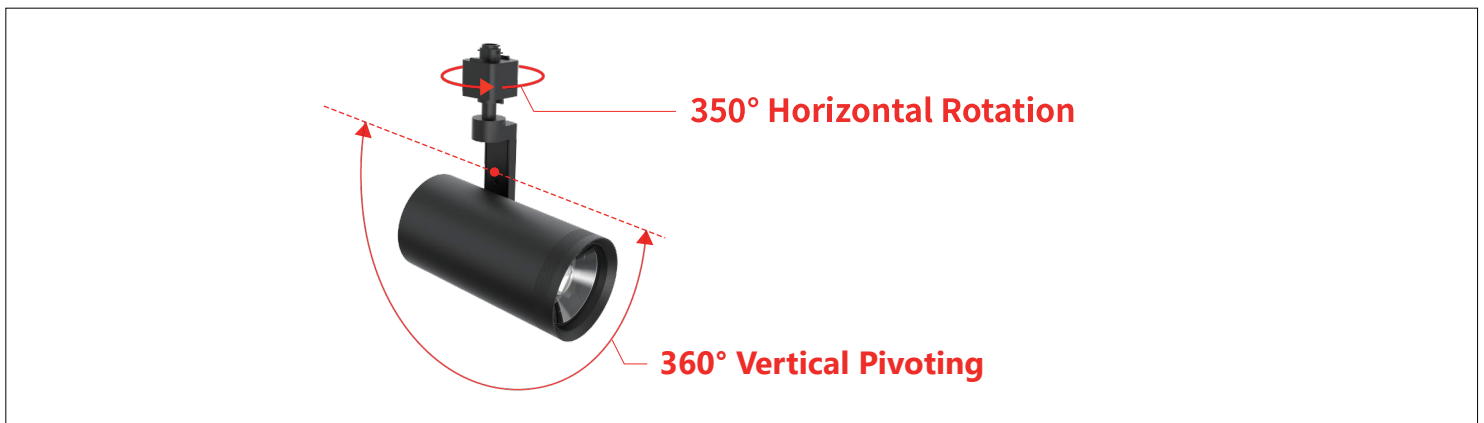

Beam angle:

- Zoomable track light heads 20° - 50° adjustable to meet different application requirements




Application:

- Recommended Use for Retailers, Supermarkets, Restaurants, Shopping Mall, Grocery, Hospitality, Commercial, Residential, Exhibit etc.


Wattages: 10W, 20W, 30W

PRODUCT DIMENSION:



10W




20W | 20/15/10W




30W | 30/25/20W

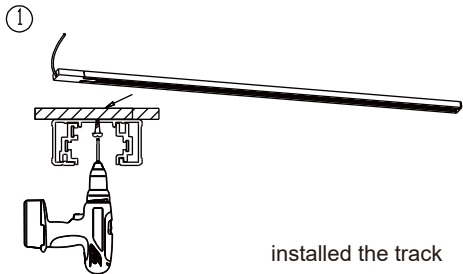

installed the track

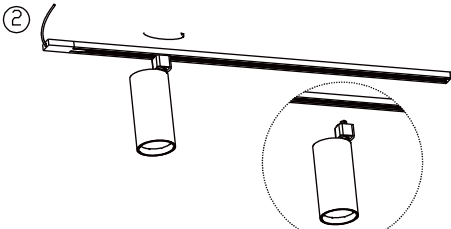

Snaped the luminaire into track and rotate 90 degree to fix the luminaire

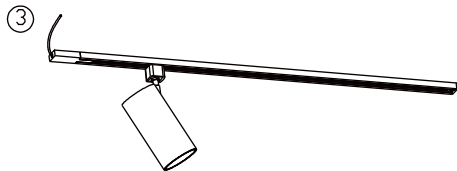

Adjust to proper angle, connect the mains supply

Other installation methods



MONOPOINT



SURFACE




PENDANT



TRACK PENDANT

Wattages: 10W, 20W, 30W


Optional accessories

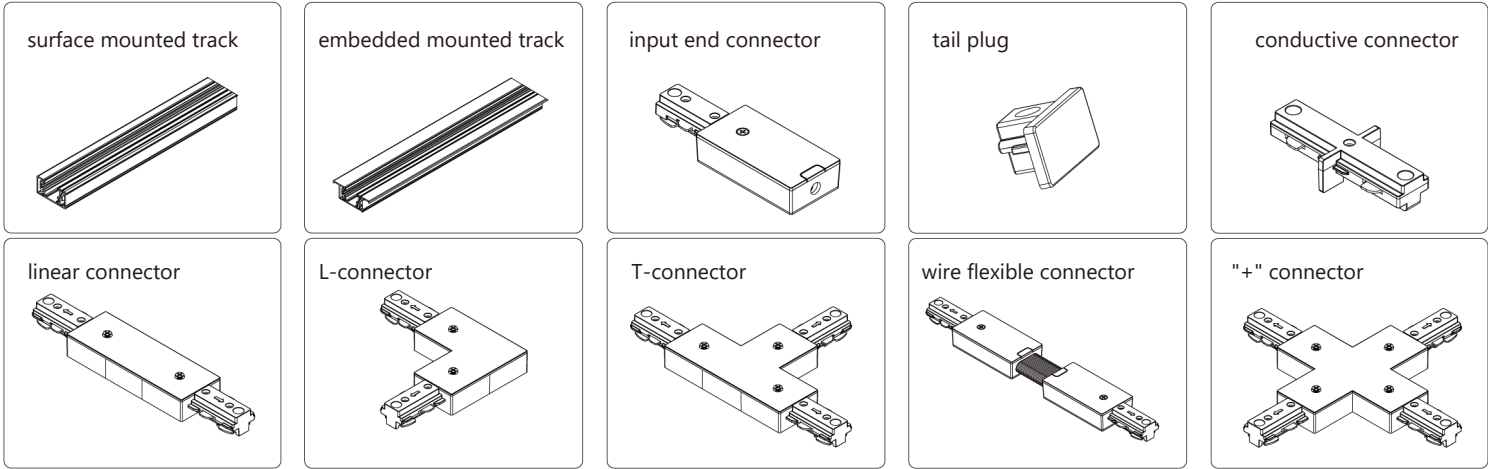

ORDERING GUIDE:

EXAMPLE:

TL04-20W-H-XX-TCP(XX)

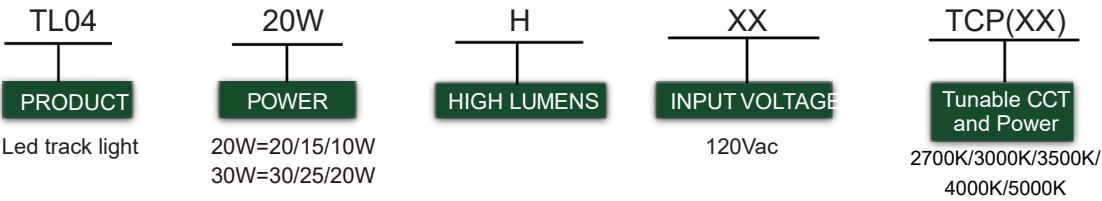

Rail system connection diagram:

Before installation, cut off the spring tab on one side of the ground wire connector and connect it effectively to the track's ground copper wire.

