

# LED Tri-Proof Linear Luminaire



## FEATURES

- IP 65, water tight and dust tight
- Suitable for wet location
- Available in 4 foot and 8 foot
- Aluminum housing for thermal management and polycarbonate lens
- 0-10V Dimmable
- Option: available with emergency backup kit/motion sensor



## Application

- Parking garages; docks; subway station; canopy; walk-in refrigerators; awning
- Indoor and Outdoor Application

**Application:** Parking garages; docks; subway station; canopy; walk-in refrigerators; awning...



Specifications:		
Model No.	4FT-VE401-32W-XXK	8FT-VE401-64W-XXK
Power:	32W	64W
Input Voltage:	AC100-277V	
Luminous Flux:	4160	8320
Efficacy:	130 lm/W	
Power Factor:	>0.9	
THD:	<10%	
CCT:	5000K (4000k Option)	
CRI:	>80	
Working Life:	>50,000 hours	
Working Temperature:	-10°F to 105°F	
Protection Level:	Wet Location/IP65	
Product Size:	2.46" x 2.24" x 47.63"	2.46"x2.24"x95.27"
Qty/Pack	10	6
Packing Size:	6.67"x14.96"x52.36"	6.67"x9.45"x99.61"




## Ordering Guide

Model No: HY-(X)FT-LV401-(XX)W-(XX)K				
	Length	Product	Watt	C.C.T.
	4FT	VE401: Linear Vapor Proof Luminaire	32W	50K: 5000K
	8FT		64W	

# DIMENSION

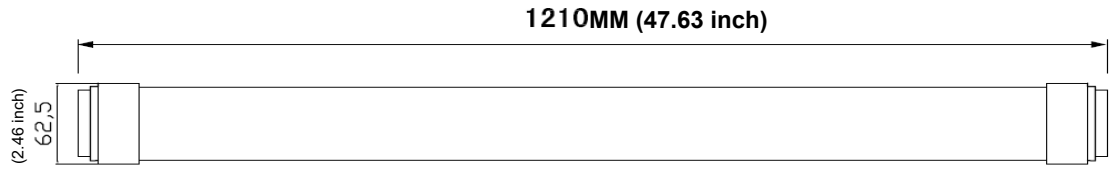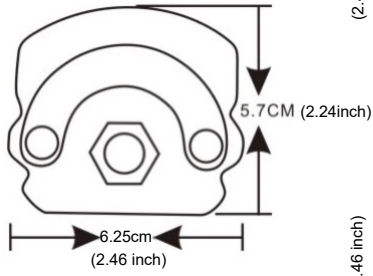

Input voltage: AC120~277V white: N , Black: L , Purple: 0~10V+ , Gray: 0~10V -

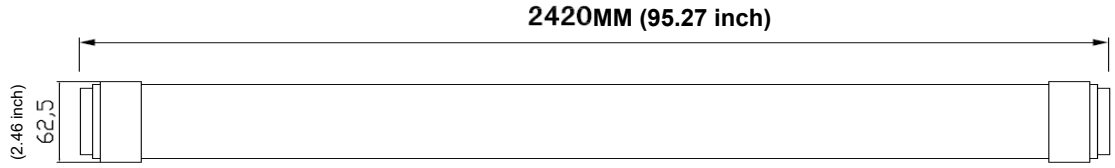


Input voltage: AC120~277V white: N , Black: L , Purple: 0~10V+ , Gray: 0~10V -

# Installation Guide

## Instruction # 1


Installation




Ceiling installation

## Instruction # 2


### Step 1

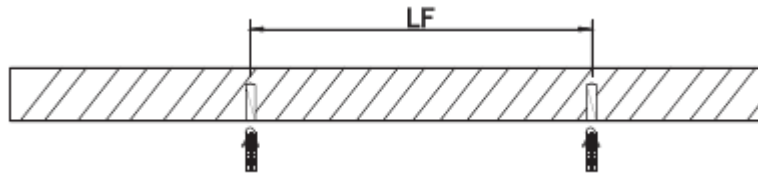

### Step 2

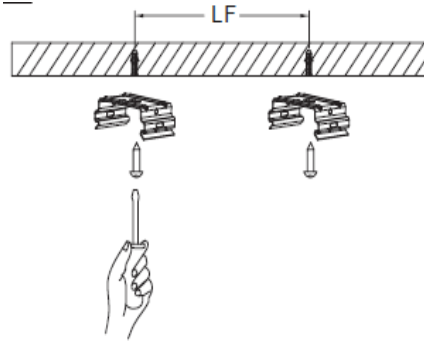

### Step 3

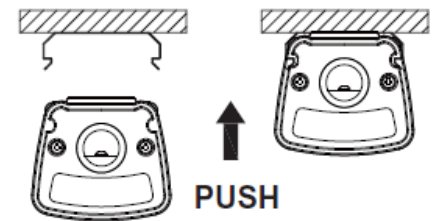

# PHOTOMETRIC REPORT

