



LED Decorative Highbay Light

VBL-02-G6



Better solutions for a Led Highbay Light

- IP65 water-proof
- AC100-277V 50/60Hz
- Easy Installation
- 135Lm/w

Options

Power	Color	Beam Angle
MEAN WELL DRIVER	3000K	50°
HBG series A: Standard on/off	4000K	90°
HBG series B: Dimmable	5700K	
HBG series AB: Dimmable		



Application


Factories, Steel Mills, Steel Smelting Plants, Manufacturing Plants & Warehouses
 Farms and Industrial Installations, sport Facilities & Workshops, Storage Facilities & Warehouses
 Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.

Specifications

Item	Power	Lumen	Leds	CRI	Weight	Beam Angle
VBL80W-02-G6	80W	10800Lm	LUMILEDS 3030	> 80	3.70kg	50°/90°
VBL100W-02-G6	100W	13500Lm	LUMILEDS 3030	> 80	3.70kg	50°/90°
VBL120W-02-G6	120W	16200Lm	LUMILEDS 3030	> 80	4.64kg	50°/90°
VBL150W-02-G6	150W	20250Lm	LUMILEDS 3030	> 80	5.26kg	50°/90°

Dimensions(mm)

Photometry

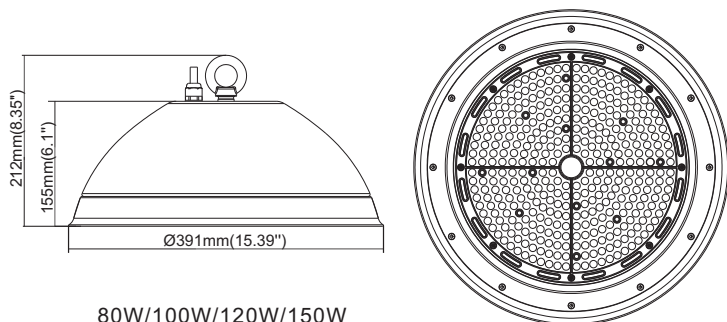

80W/100W/120W/150W

50°

90°



VBL-02-G6

LED Highbay Lights



Installation and use

