

VBRK-LED6A

6" Architectural Downlight

STANDARD



FEATURES

- Available in 3500k, 4000k, and 5000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.**
- Provides 1,500 nominal lumens.
- 17 nominal watts.
- Color rendering index (R_a) > 80.
- 120-277 (50-60Hz) AC voltage is standard.
- Power factor > 0.90.
- 0-10V dimming.
- Thermoplastic and aluminum construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs and flexible conduit.
- Compatible with insulated, non-insulated, and air-tight ceilings.
- Compatible with 6.25" ceiling cut-outs and most 6" mounting frames.
- This device is not intended for use with emergency exits.

WARRANTY & LISTINGS

- cETLus listed for wet locations (new construction).
- cETLus classified for wet locations (retrofit).
- Energy Star certified.
- Title 24 compliant.
- Complies with FCC Part 15, class A.
- 5-year warranty of all electronics and housing.


* Contact factory for other color temperatures and lumen packages.
 ** L_{70} hours are IES TM-21-11 calculated hours.



COMPATIBLE DIMMERS

MANUFACTURER & SERIES	PART NUMBER
Sylvania	45167
Leviton Decora	IP710-LFZ
Lutron Diva	DVSTV-WH
Cooper	DF10P-C1

DIMENSIONS

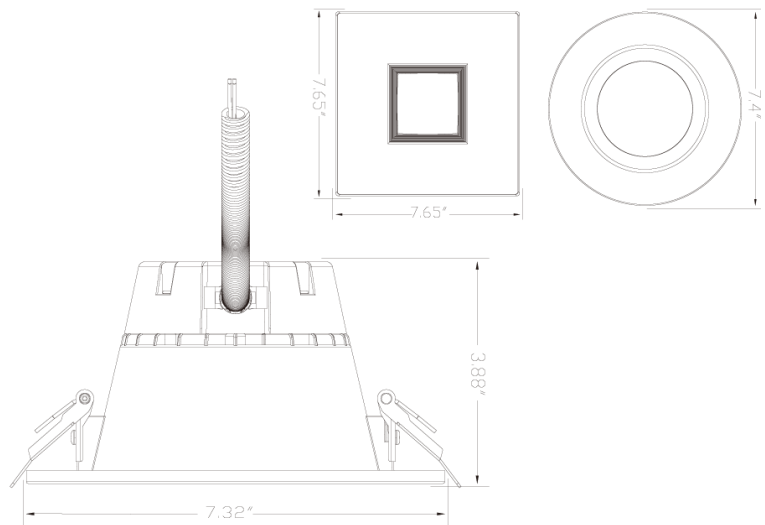

ORDERING INFORMATION

Example: VBRK-LED6A-BW-35K-ECO

Series	Trim Type	Color Temperature	Accessories (Order Separately)
VBRK-LED6A	BW Baffle	35K-ECO 3500K 4K-ECO 4000K 5K-ECO 5000K	LED56-TRMPLT-ECO-SQ Square snap trim LED6A-TRMPLT-ECO-SPWHT Specular white snap trim LED56-TRMPLT-ECO-BK Black snap trim LED56-TRMPLT-ECO-N Nickel snap trim LED56-TRMPLT-ECO-BZ Bronze snap trim BL6CLED-ND Mounting frame with j-box