



COMMERCIAL POST LIGHTING

Value Engineered Lighting
Phone 888-668-1195 Fax 240-668-9415



MADE IN THE
USA

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Fitter
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression



ACORN SERIES

TUSCAN FITTER


DORIC FITTER

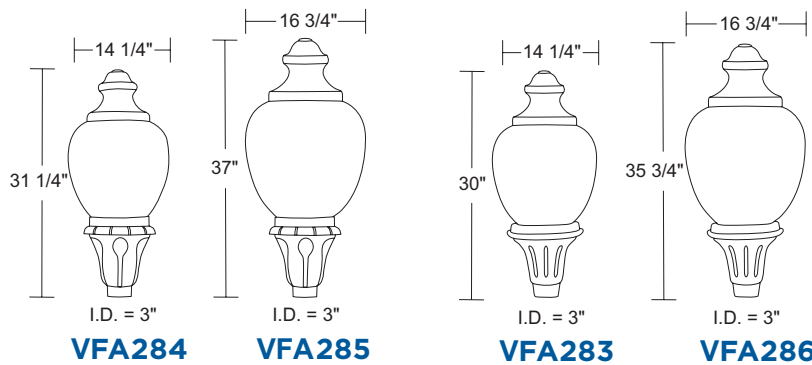

Acorns have 8" Neck

GUIDE: FA284-L4000C-BP-F

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFA283-Doric	120-277V LED	C-4K (Standard)	B-Black	POLYCARBONATE	F-Acorn Finial Topper
VFA284-Tuscan	L4000-40W 4000lm	W-3K (Special Order)	W-White	P-Clear Textured	T3-Type III Distribution
VFA285-Tuscan	L6000-60W 6000lm	B-5K (Special Order)	Z-Bronze	ACRYLIC	(T3 is Special Order, Type V Standard)
VFA286-Doric				W-White Textured C-Clear Textured F-Frost Textured	

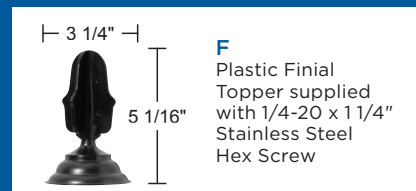

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Fitter
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression



ACORN SERIES


DORIC FITTER

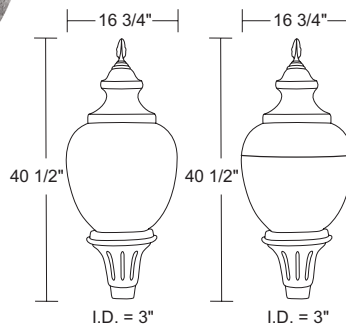

VFA291
Small Hood

VFA293
Large Hood

TUSCAN FITTER

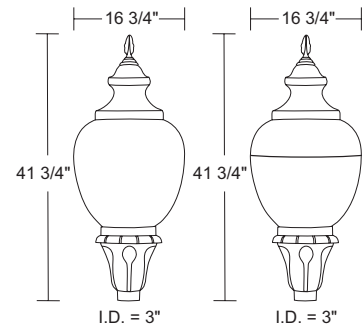

VFA292
Small Hood

VFA294
Large Hood

Acorns have 8" Neck

GUIDE: VFA291-L4000C-BP-T3

ITEM #	LIGHT SOURCE	BODY	LENS	OPTIONS
VFA291-Doric	120-277V LED	CCT	POLYCARBONATE	T3-Type III Distribution
VFA292-Tuscan	L4000-40W 4000lm	C-4K (Standard)	P-Clear Textured	(T3 is Special Order, Type V Standard)
VFA293-Doric	L6000-60W 6000lm	W-3K (Special Order)	ACRYLIC	
VFA294-Tuscan		B-5K (Special Order)	W-White Textured	
			C-Clear Textured	
			F-Frost Textured	

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Fitter
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression




ACORN SERIES

TUSCAN FITTER

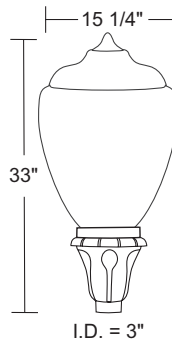

VFA275

DORIC FITTER

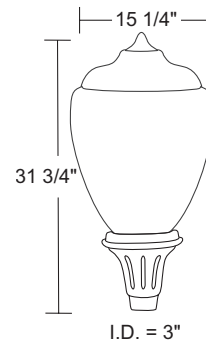

VFA276

Acorns have 8" Neck

GUIDE: VFA275-L4000C-BP-T3

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFA275-Tuscan VFA276-Doric	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C-4K (Standard) W-3K (Special Order) B-5K (Special Order)	B-Black W-White Z-Bronze	POLYCARBONATE P-Clear Textured ACRYLIC W-White Textured C-Clear Textured F-Frost Textured	T3-Type III Distribution (T3 is Special Order, Type V Standard)

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Fitter
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression




ACORN SERIES

TUSCAN FITTER

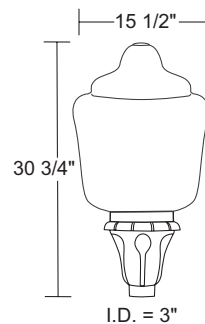

VFA277

DORIC FITTER

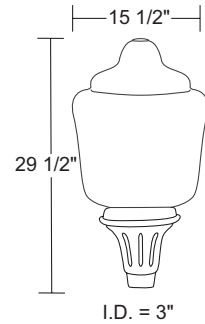


VFA278

Acorns have 8" Neck

GUIDE: FA277-L4000C-BP-T3

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFA277-Tuscan	120-277V LED	C-4K (Standard)	B-Black	POLYCARBONATE	F-Acorn Finial Topper
VFA278-Doric	L4000-40W 4000lm	W-3K (Special Order)	W-White	P-Clear Textured	T3-Type III Distribution
	L6000-60W 6000lm	B-5K (Special Order)	Z-Bronze	ACRYLIC	(T3 is Special Order, Type V Standard)
				W-White Textured	
				C-Clear Textured	
				F-Frost Textured	

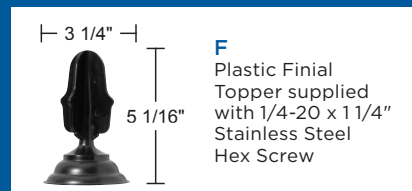

COMMERCIAL POST LIGHTING




RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Housing
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression



TOWN CENTER SERIES

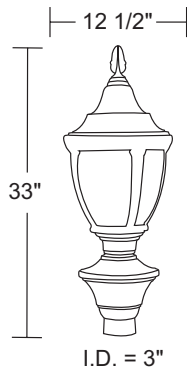

VFT236
(shown with R3)

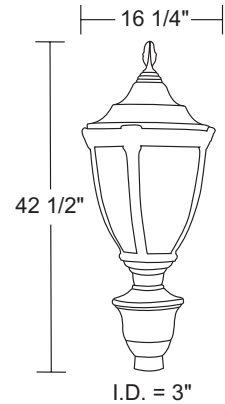

VFT237

GUIDE: VFT236-L4000C-BC

ITEM #	LIGHT SOURCE	CCT	BODY	LENS
VFT236 VFT237	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C-4K (Standard) W-3K (Special Order) B-5K (Special Order)	B-Black W-White Z-Bronze	ACRYLIC W-White C-Clear

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Housing
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression


CITY HALL SERIES




VFH259

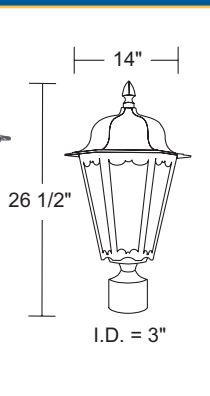

VFH232

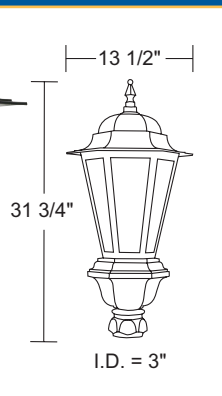

VFH233

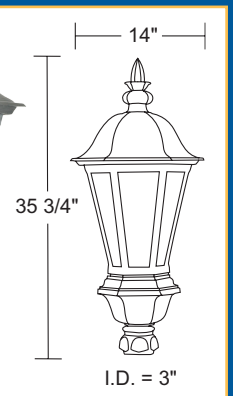

GUIDE: FH259-L4000C-BF-B3

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFH259	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C -4K (Standard) W -3K (Special Order) B -5K (Special Order)	B -Black W -White Z -Bronze	GLASS F -Frosted	ACRYLIC BLACK OUT PANELS B1 -One Panel B2 -Two Panels B3 -Three Panels

GUIDE: FH232-L4000C-BW-B3

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFH232 VFH233	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C -4K (Standard) W -3K (Special Order) B -5K (Special Order)	B -Black W -White Z -Bronze	ACRYLIC W -White C -Clear Prismatic	ACRYLIC BLACK OUT PANELS B1 -One Panel B2 -Two Panels B3 -Three Panels

COMMERCIAL POST LIGHTING



RoHS compliant




- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C (-40°F) to +40°C (105°F)
- Cast Aluminum Housing
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression

PARKWAY SERIES





VFP231

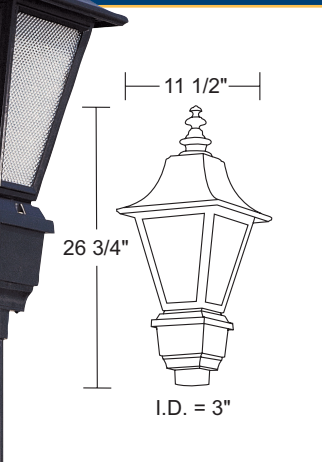

FUTURA SERIES



VFF240

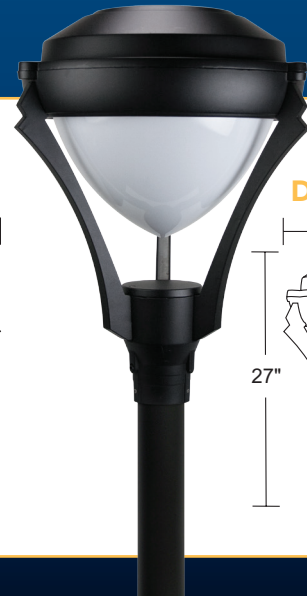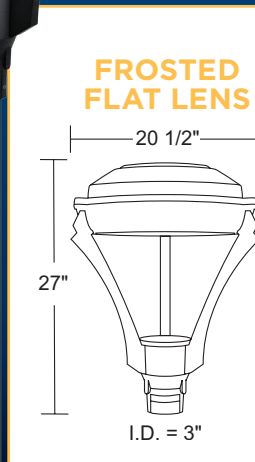

GUIDE: FP231-L4000C-BW-B1

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFP231	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C-4K (Standard) W-3K (Special Order) B-5K (Special Order)	B-Black W-White Z-Bronze	ACRYLIC W-White C-Clear Prism	ACRYLIC BLACK OUT PANELS B1-One Panel B2-Two Panels B3-Three Panels

GUIDE: FF240-L4000C-BF

ITEM #	LIGHT SOURCE	CCT	BODY	LENS
VFF240	120-277V LED L4000-40W 4000lm L6000-60W 6000lm	C-4K (Standard) W-3K (Special Order) B-5K (Special Order)	B-Black W-White Z-Bronze	ACRYLIC W-White Drop Lens F-Frosted Flat Lens

COMMERCIAL POST LIGHTING



RoHS compliant



- 120-277V Input Voltage, 50/60Hz
- Driver UL Class 2, Power Factor >.90
- Ambient Operating Temperature -40°C(-40°F) to +40°C(105°F)
- Cast Aluminum Housing
- Thermal Protection
- Estimated 50,000 hrs L₇₀
- 5 Year Warranty
- Posts Sold Separately
- Integral Surge Supression
- Optional Ground Surge Supression

CITY HALL SERIES



VFH259

PARKWAY SERIES



VFP231

GUIDE: FH259-L2000C-BF-B3

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFH259	120-277V LED L2000-23W 2000lm	C-4K (Standard)	B-Black W-White Z-Bronze	GLASS F-Frosted	ACRYLIC BLACK OUT PANELS B1-One Panel B2-Two Panels B3-Three Panels

GUIDE: FP231-L2000C-BW-B1

ITEM #	LIGHT SOURCE	CCT	BODY	LENS	OPTIONS
VFP231	120-277V LED L2000-23W 2000lm	C-4K (Standard)	B-Black W-White Z-Bronze	ACRYLIC F-Frosted	ACRYLIC BLACK OUT PANELS B1-One Panel B2-Two Panels B3-Three Panels