


Model: VE308.200200

## LED Brick 200x200x55mm



- Waterproof:** Original triple structure with glue waterproof patent, private mold waterproof connector and reliable waterproof performance, up to IP67-IP68;
- Texture:** Surface texture hardness up to 5°, anti-scratch, anti-wear, acid & alkali resistant, customizable texture and pattern;
- Customization:** Customizable size & shape;
- Interaction:** Interactive induction available, game interaction program implantable, with strong experience feeling;
- Application:** Municipal and commercial squares, garden paths, cultural tourism projects, etc.



### Specification


|   |
|---|
| LED Type : Cree, Osram, Lumileds, Nichia etc.                               |
| Input Voltage : 24VDC   |
| Power Rating : 2.6W   |
| Beam Angle : 120°   |
| Color Temperature : White, R, G, B, RGB                                     |
| Life Span : ≥50000 hrs  |
| Housing : Stainless steel body, high-strength tempered textured glass cover |
| Dimension : 200x200x55mm  |
| Weight : 3kg  |
| Working Temperature : -30°C ~ +65°C   |
| Control : ON/OFF, DMX512  |
| Ingress Protection : IP67   |
| Classification : Class III  |
| Installation: Embedded buried installation (recessed box required)          |

### Project Cases


Guiyang Fortune Street Guizhou




### Size

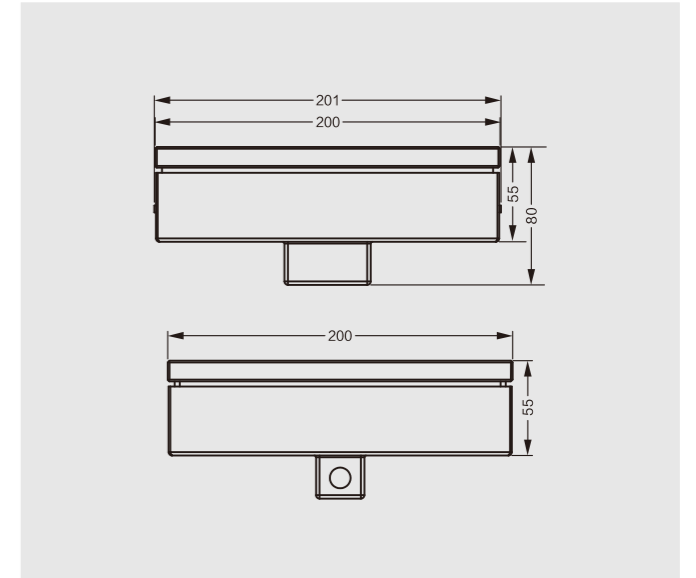

### Installation

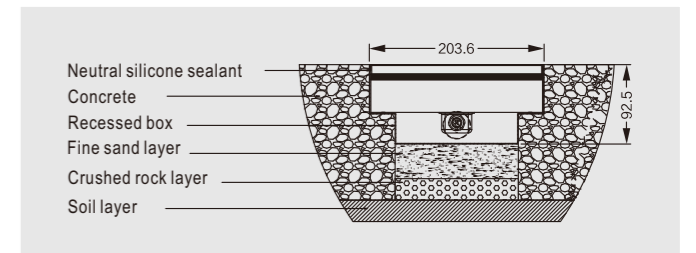

### Recessed box

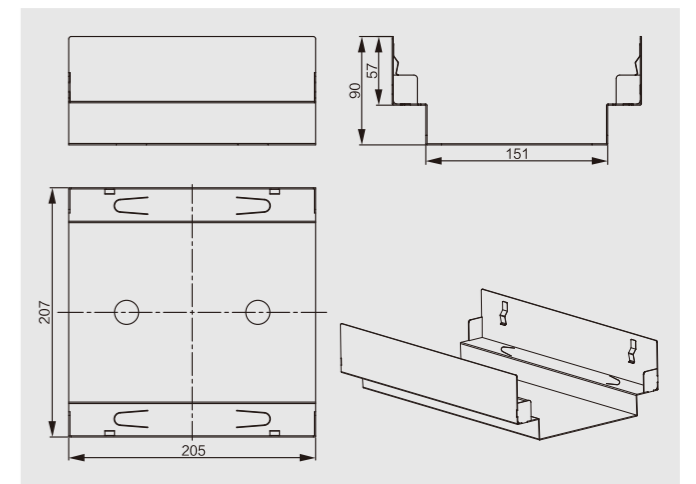

### Fixture Options

| Spec    | Size         | Texture  | LED color           | Voltage | Power | Control        | Other options  |            |                                    |                                 |
|---------|--------------|--|---------------------|---------|-------|----------------|----------------|------------|------------------------------------|---------------------------------|
| 200x200 | 200x200x55mm | Granite, Caesar Grey, Yellow Granite, Red Granite, etc | White, R, G, B, RGB | 24VDC   | 2.6W  | ON/OFF, DMX512 | With induction | Drive over | Stainless steel; Die-cast aluminum | Continuous connection in series |

\* The contents and parameters of this product are for informational purposes only, subject to change without any notice, please refer to real product, our company reserves the final interpretation.