VFD206 DESIGNER LED POST TOP

ValueEngineeredLighting
ARCHITECTURAL LIGHTING PRODUCTS

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Fits 3" Diameter Post

BAA FIXTURE

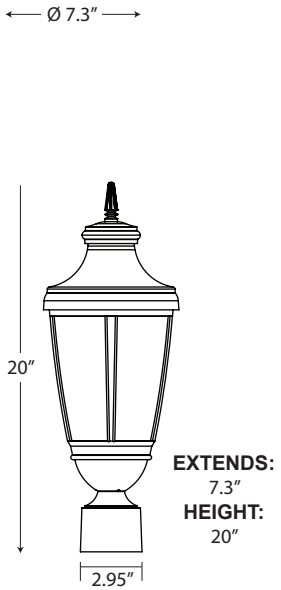

EXTENDS: 7.3″
HEIGHT: 20″

c UL us

EXAMPLE # VFD206-I60-BC-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
VFD206	**DEDICATED 120V LED** EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40˚C TO +40˚C, 5 YEAR WARRANTY, DIMMABLE **LE800** - 13W, 80 CRI >88 Lumens Per Watt** **W-**1140lm 3000K **C-**1280lm 4000K **LE1200** - 14W, 80 CRI >102 Lumens Per Watt** **W-**1430lm 3000K **C-**1500lm 4000K **INCANDESCENT 120V** INCANDESCENT, MEDIUM BASE, 120V **I60-**1 X 60W Max	**B-**Black **W-**White **Z-**Bronze	ACRYLIC **C-**Clear **F-**Frost	N/A LED LAMP, 3 YEAR WARRANTY, DIMMABLE **LWE-**A19/E26, 90CRI, 3000K **LCE-**A19/E26, 80CRI, 4000K