



# Model VHLXC Hazardous Location Combo

## HOUSING

- Durable Fiberglass NEMA 4X rated housing
- Steel Mounting Feet
- Hinged access panel/door in neutral gray finish
- Red or Green high efficiency LED panel
- PAR36 top mounted high impact thermoplastic heads

## ELECTRICAL

- Dual voltage 120/277VAC
- Operating Temperature: 10° - 40°C
- Solid state charging and switching
- Brownout protection
- Battery low voltage disconnect (LVD)
- Overload and short circuit protection
- AC power indicator and test switch

## BATTERY


- Maintenance-free Sealed Lead Acid Battery
- NiCad Battery optional
- Battery will operate fixture for a minimum of 90 minutes in the event of a power outage
- Recharge time is 24 hours

## CODE COMPLIANCE

- NEMA 4X
- Class 1, Div 2, Groups A, B, C, and D
- Meets UL Requirements
- CSA/CUL Listed
- **BUY AMERICA COMPLIANT**

## WARRANTY

- 5 year warranty

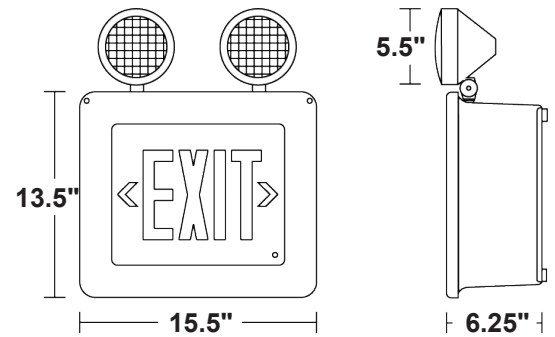

MODEL	FACE	COLOR	VOLTAGE/WATTAGE	OPTIONS
VHLXC	1	RG (Red Letters)	6V36	SD - Self Diagnostics
		GG (Green Letters)	6V42-NI	FPL - Food Prep Lenses
			6V54-NI	TD - Time Delay
			6V60	AM - Ammeter
			6V72	VM - Volt Meter
			6V90-NI	FA - Fire Alarm
			6V100	SM - Side Mounted Heads
			6V120	8H - 8W Halogen Lamps
			12V36	WG - Wire Guard
			12V42-NI	TPS - Tamper Proof Screws
			12V60	SWXE - Special Wording Panel (prefix to p/n)
			12V72	
			12V90-NI	
			12V120	
			12V130-NI	
			12V140	
			12V160	
			12V180	