


## Specification

Model	Watt	Input Voltage	Wavelength	UV irradiation intensity, 1m distance, 27°C environment temperature. (μw/cm2)	Fans noise, 1m distance (DB)	Tube Type	LED CCT	LED Lumen	CRI	Dimension	Working Temperature (°C)	IP grade
U19-125W-01	125W	100-277V 50/60Hz	254nm	100	1 level:27	G5/T5	3000K	5200LM	≥80	1065*209*163mm	-10~60°C	IP20
					2 level:32		4000K	5500LM	≥80			
					3 level:46		5000K	5500LM	≥80			


## Features

### U19 product features: 1 - UVC safety protection

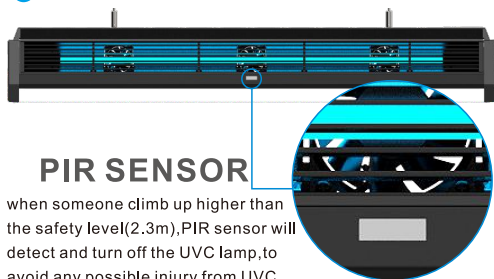

#### PIR SENSOR


when someone climb up higher than the safety level(2.3m),PIR sensor will detect and turn off the UVC lamp,to avoid any possible injury from UVC irradiance.

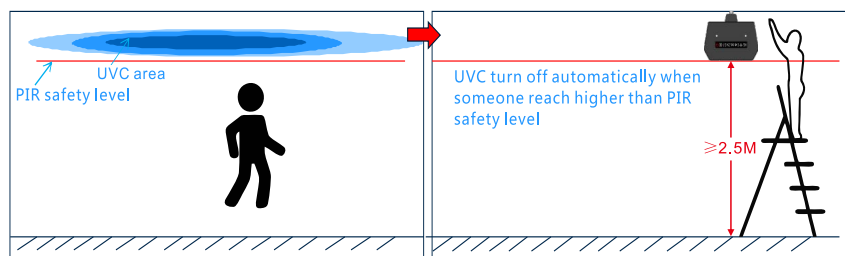

## Features


### ● Feature 2 - Upper room purification

The upper room air purification, while commercial activities continue below. Environmentally friendly-no ozone emission during or after use.

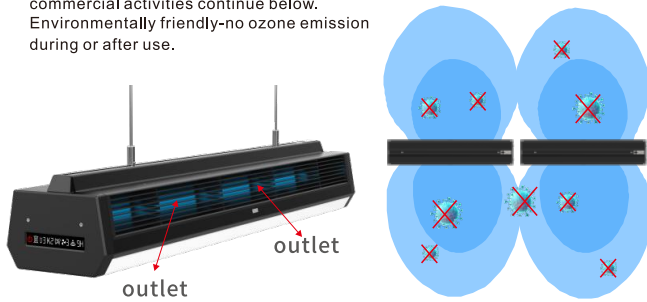



### ● Features 3 - Air flow system

Built-in fan for more air flow, to increase the air purification efficiency.

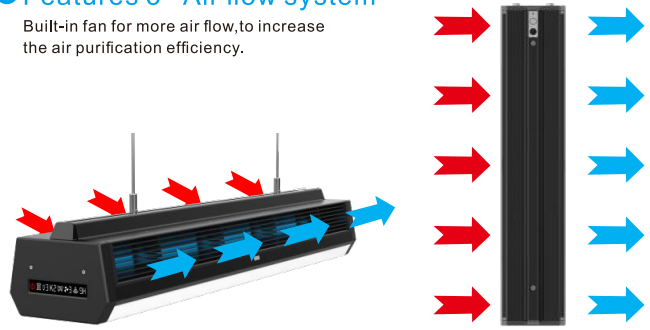


### ● Features 4 - LED lighting


LED lighting brightness has 1-5 setting steps (20%/40%/60%/80%/100%); and 1-3 CCT setting steps (3000k/4000k/5000k)

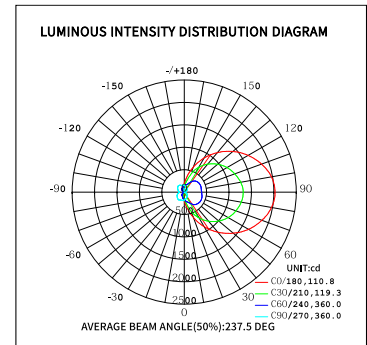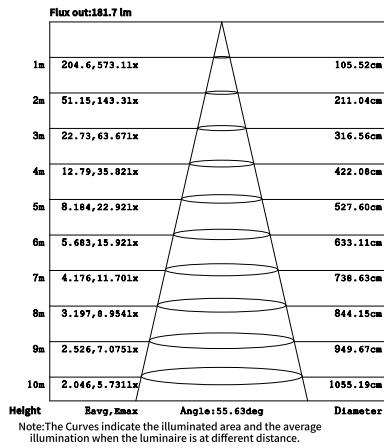


### ● Features 5 - Digital display, remote control.

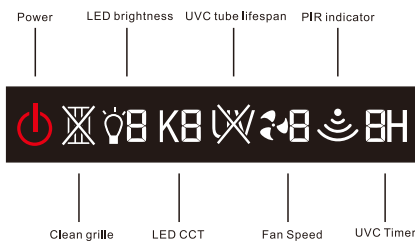

Remind: when connected to power, indicator will be RED, other time it will be white.

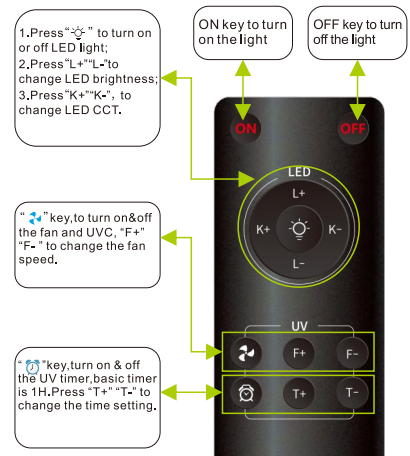

## Application

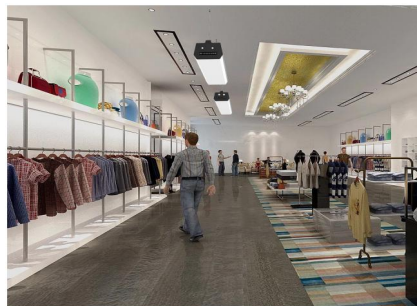

Applications: office / retail / food store / hotel / school / bank / washroom