


VLED-ARFK9



120V-277VAC LED 9", Non-IC, Architectural RetroKit
Down Light with interchangeable Reflector Trims



9" Architectural LED



8-5/16"
(212mm)



Ceiling Cut-out : 9-3/4"

DESCRIPTION

The VLED-ARFK9 is an Architectural grade, Non-IC, LED Recessed Downlight Retrokit and is available with multiple Trim Modules. It is designed for use with existing 9" Architectural Incandescent, Fluorescent and Metal Halide Housings. It is also compatible with most 9" architectural housings measuring at least 8-5/16" high with an inside diameter between 9-1/2" and 10" (See Housing Compatibility section). Available with a 14W, 23W, 30W or 45W high efficacy LED engine and universal, dimmable drivers. The optical diffuser produces high lumen transmission and even illumination. Suitable for Wet Locations.

DESIGN FEATURES

LED Module & Trim

- Painted, extruded aluminum heat sink designed to facilitate efficient heat dissipation for superior thermal management and reliability.
- LED engine includes LED, heat sink and lens assembly.
- Heavy gauge aluminum reflector anodized in clear haze or white paint finishes. Multiple trim styles and finishes are available.

LED Driver

- Universal, 120~277V input, high efficacy drivers with dimming capability by ① a Triac 120V low voltage electronic dimmer switches or ② 0-10V, Triac & ELV dimmer switches.
- Drivers feature power factor >.90, THD <20% with integral thermal protection to sense over temperature or electrical issues.
- Driver mounts externally to the module to allow future replacement or upgrading if desired.
- Optional Lutron Hi-lume A-Series, LED drivers and EcoSystem 5-Series LED drivers are available. Lutron drivers provide flicker-free, smooth, continuous dimming down to 1% for Hi-lume and 5% for EcoSystem. (Contact factory for dimming system requirements)

Electrical Connection

- Attach supply line to existing junction box through one of the knockouts provided in junction box. The existing socket whip and ballast can be set aside above the ceiling or removed completely.

Retrokit Mounting

- Designed for use with most existing 9-1/2" - 10" aperture architectural incandescent, fluorescent and metal halide housings. Supplied with flexible metal conduit for connection to existing electrical junction box. Existing frame-in kits mounting via friction springs or clips.

Options

- Emergency battery back-up : Available in mounted to fixture or remote, adjacent to luminaire (consult with factory for space requirements).

Limited Warranty


- LED Module: 5 years/50K hours
- Product/Driver: 3 years

Listing

- cETLus Wet Location
- ENERGY STAR
- California Title 24

SPECIFICATION				
Input Voltage	120-277VAC			
Wattage (+/-5%)	14W	23W	30W	45W
Lumen (+/-5%)	935	1,700	2,195	3,370
Efficacy (LPW)	66.8	73.9	73.2	74.9
Beam Angle	63.2°	66.5°	66.6°	63.3°
CRI (Typical)	80, 90			
CCT (Color +/-5%)	2700K, 3000K, 3500K, 4000K			
Dimming	0-10V, ELV & TRIAC Optional Lutron Drivers			
LED Module	5 yr/50K hr			
Environment	Wet Location			

Triac Approved Dimmers
* Lutron: NovaT (Ntelv 300&600) Diva (Dvelv-300P&303P)
* Leviton: Acenti: Ate06-1Lw
* Leviton Trimatron #705W (incandescent)
0-10V Approved Dimmers
* Lutron: Nova® 0-10V : NTFTV Diva® 0-10V : DVTV
* Leviton: Decora 0-10V : IP710DL
Consult tech. service or factory for additional dimmers

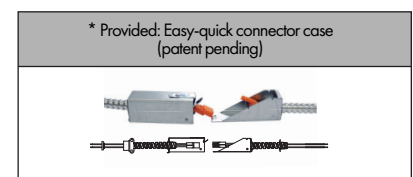


HOUSING COMPATIBILITY for the LED-ARFK9 RETROKIT ONLY

LED-ARFK9 ETL Listed for installation in the following Lumtech standard architectural housings;

- 9" : FH-VC9, FH-VA9, FH-VAR9, FH-HA9, FH-HAR9, FH-HC9, IH-VF9300, IH-VA9300, IH-VAR9300, IH-HF9300, IH-HA9300, IH-HAR9300, MH-VF9, MH-VA9, MH-VAR9, MH-(HF9, HA9, HAR9)

TRIM

* Wide beam reflector is standard. Also available narrow beam in reflector(consult with factory).



LEDT-R94
Specular Open Reflector

LEDT-R914
Baffle w / Reflector

LEDT-R941
Baffled Lens w / Reflector


LEDT-R940
Reflector w /
Frosted Floating Lens

LEDT-R922
Reflector w /
Regressed Lens


* All trims are rated for damp location and regressed lens trims are wet location listed.
* LEDT-R941 is suitable and rated for shower location.

PHOTOMETRIC REPORT


* Contact Factory for IES File

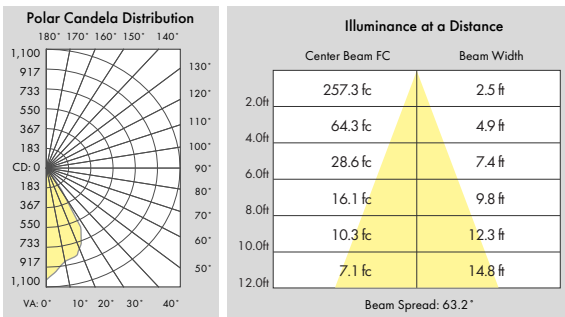


V[LED-ARFK9-14-830+LEDT-R94]

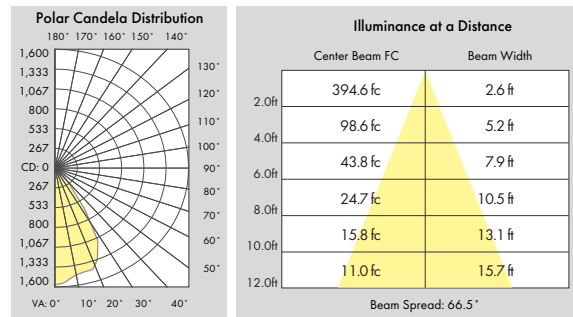

V[LED-ARFK9-23-830-W+LEDT-R94]

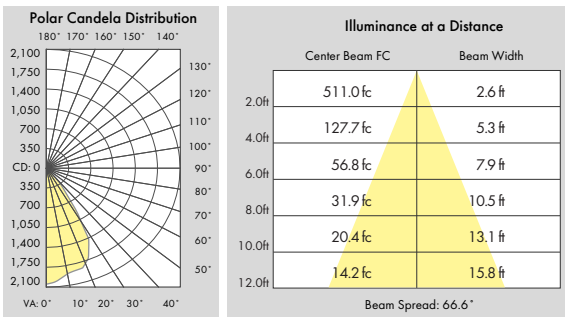

VLED-ARFK9-30-830+LEDT-R94]

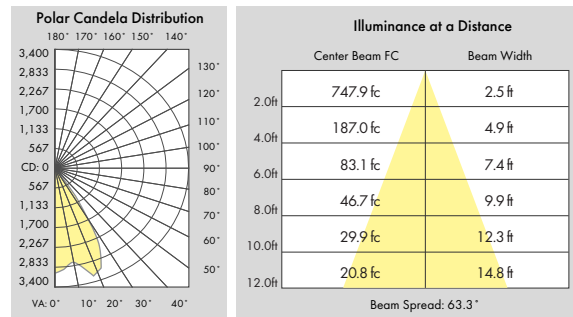

[VLED-ARFK9-45-830+LEDT-R94]

Ordering Information

Model	-Watts	-CRI	Color Temp.**	Driver*	Trim	-Reflector Finish**	Baffle Finish for LEDT-R914 & R941	Optional Metal Trim Ring Finish
VLED-ARFK9 = 9", Non-IC, Architectural Down Light Retrokit	-14 = 14W -23 = 23W -30 = 30W -45 = 45W	-8 = 80 -9 = 90	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	UTD = 120-277VAC, Triac: 10-100% Dimming (14, 23 & 30W only) UZTD = 120-277V, 0-10V, Triac & ELV: 1-100% Dimming L1D = Lutron Hi-Lume 1% Dimming L5D = Lutron EcoSystem 5% Dimming L2E = Lutron Hi-Lume 1% 2-Wire Dimming * - Option -EM = Emergency battery backup	LEDT-R94 LEDT-R914 LEDT-R941 LEDT-R940 LEDT-R922	-HC = Haze Clear -WH = White Painted	-WH = White -BK = Black	-WH = White Plastic Trim Ring (Standard) -WMR = White Metal Ring -SN = Satin Nickel -CH = Chrome -SF = Polished Self-Flange (for Open or Wall Wash Reflectors ONLY)

Example : VLED-ARFK9-45-830UZTD

LEDT-R94-HC-WH

** Consult factory for other Color Temperatures and Finishes