

# VWRE-4FT 4-Foot Slim Wraps



## STANDARD



## FEATURES

- Available in 3000k (warm white), 3500k (warm/neutral white) 4000k (neutral white) and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 50,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ).\*\*
- Delivers 4,600 lumens at 4000k from 40 watts. 115 lumens per watt (LPW).
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc, continuous dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index ( $R_a$ )  $\geq$  80. Renders red colors ( $R_g$ )  $\geq$  0.
- LED color maintenance during the first 6,000 hours measured at < 0.004 on the CIE1976 chromaticity diagram.
- Polycarbonate lens resists cracking.
- Includes cover plate to cover junction boxes when surface-mounting the luminaire to ceiling-mounted junction boxes..
- Easy installation in new construction or retrofit applications.


\* Contact factory for other color temperatures and lumen packages.  
 \*\* L70 hours are IES TM-21-11 calculated hours.

## WARRANTY & LISTINGS

- cULus listed for damp locations in ambient temperatures from -20°C to 45°C (-4°F to 113°F).
- DLC V5.0 standard approved.\*
- Flicker-free per IEEE1789-2015 (low risk/ no observable effects of flicker at 100% light output level at 100% light output level).
- Complies with FCC Part 15, class A
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\* Excludes 3000k.

## DIMENSIONS

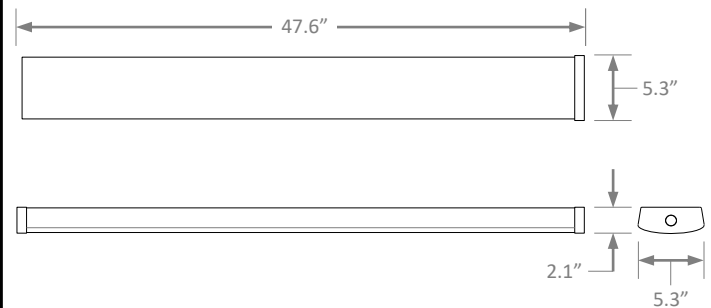

Weight: 3.8 lbs.

## ORDERING INFORMATION

Example: CWRE-4FT-4L-3K

Model	Length		Nominal Lumen Output		Color Temperature	
	4FT	4-Foot	4L	4k Lumens	3K	3000k
VWRE					35K	3500k
					4K	4000k
					5K	5000k