



# LED Linear Suspended

## PRODUCT DESCRIPTION


V.E. VX811-ELM series architectural linear LED suspension lighting fixtures bring clean lines and clear light to commercial LED or residential lighting interiors. Our sleek, stylish fixtures are highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more. Our Linear Lights are a stylish alternative to downlights. Linear lights can create a functional yet relaxing atmosphere and provide an even wash of light within a space. Our Linear Lighting can be customized to your desired length, look & colour temperature and can either be suspended, surface mounted or recessed to suit your needs. Linear lights are available to be dimmed and the color temperature can be interchangeable to allow for maximum functionality.

## FEATURES:

- Surge protector
- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel
- Low profile design optimizes shipping, storage, and handling
- Diffuser is secured continuously along luminaire sides
- Shallow depth provides sleek, low-profile appearance
- Performance engineered optical lens assembly delivers unique beam angles and reduces glare.
- High quality LED Chips provide high efficiency, heat dissipation, stability, and lumen maintenance
- Driver disconnect provided where required to comply with US and Canadian codes
- May be surface or pendant (cable, hanging chain or stem kits) mounted
- Class II driver, with 0-10V or Triac dimming

## APPLICATIONS:


- Closets/Storage rooms/Offices
- Conference rooms/Retail
- Reception areas/Hallways
- Education facilities
- Parking Garages

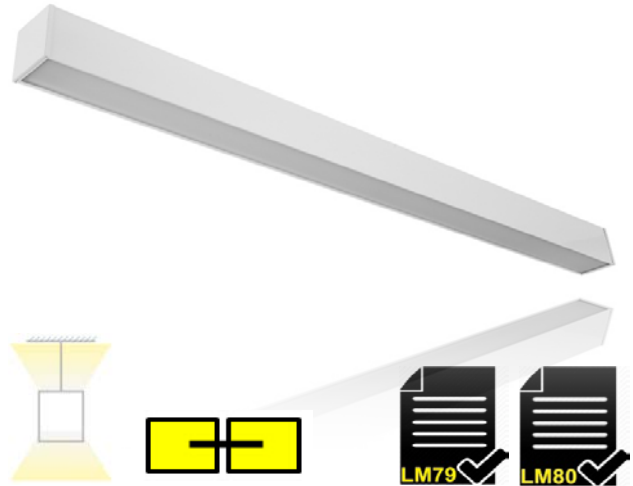

## OPTIONS:

## Order Code

AC347-480V High Voltage	347V
Occupancy Sensor	OS
Daylight Harvesting	DH
Emergency Backup	EM
CCT 3000K, 4000K, 5000K	30/40/50
Suspension Chain	SC
Clear Lens	CL
Recessed Mounting Kits	RMK

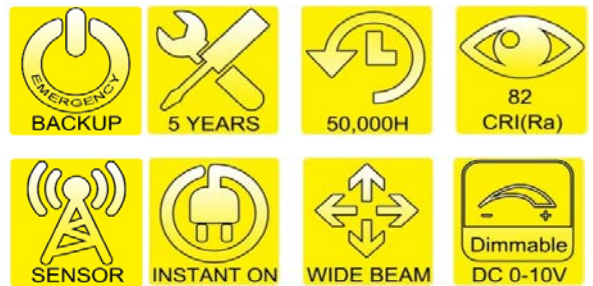

## ORDERING: (KK=CCT, can be 30,35,40,45,50,55)(The lumens are tested with frosted lens)

Item	Watts	Efficacy	Lumens	CRI	PF	Voltage	Dimension(L*W*H):Inch		
VX811ELM02512BKWW	25W	125lm/w	3,125lm	>80	>0.95	120-277V	23 7/8	2 6/8	3 1/8
VX811ELM02514BKWW	25W	125lm/w	3,125lm	>80	>0.95	120-277V	46 2/8	2 6/8	3 1/8
VX811ELM04014BKWW	40W	125lm/w	5,000lm	>80	>0.95	120-277V	46 2/8	2 6/8	3 1/8
VX811ELM08018BKWW	80W	125lm/w	10,000lm	>80	>0.95	120-277V	91 1/8	2 6/8	3 1/8

\*Please contact your V.E. Lighting representative to order products that don't have order codes listed here or any info required Specification and dimension subject to change without notice.